

We will begin soon



This conversation will be recorded and shared afterwards online and via email



You can submit your questions using the Q&A feature.



The chat feature is to communicate only with the panel.



Next stop: Westwood.

PURPLE (D LINE) EXTENSION TRANSIT PROJECT
Section 3



Panelist

Metro Purple Line Extension Team

- Marlon Walker, Community Relations Manager
- Glyssa Robles, Principal Community Relations Officer

Metro New Media Team

- Stephanie Molen, Principal Community Relations Officer

Metro Purple (D Line) Extension Transit Project



Sections 1, 2, & 3 Status

	Forecasted Schedule		
Section	Section 1	Section 2	Section 3
Length	3.92 Miles	2.59 Miles	2.56 Miles
New Stations	Wilshire/La Brea Wilshire/Fairfax Wilshire/La Cienega	Wilshire/Rodeo Century City/ Constellation	Westwood/UCLA Westwood/VA Hospital
Pre-Construction Activities	2014 – 2015	2016 – 2018	2018 – 2019
Construction	2015 – 2024	2018 – 2025	2019 – 2027
Operations	2024	2025	2027

**Subject to change. The PLE project team is working to deliver the project consistent with Measure M.*

Westwood/UCLA Station Rendering (Northwest)



Westwood/UCLA Station Rendering (Northeast)




Westwood/UCLA Station Rendering (Southeast)

DRAFT



Westwood/UCLA Station Box

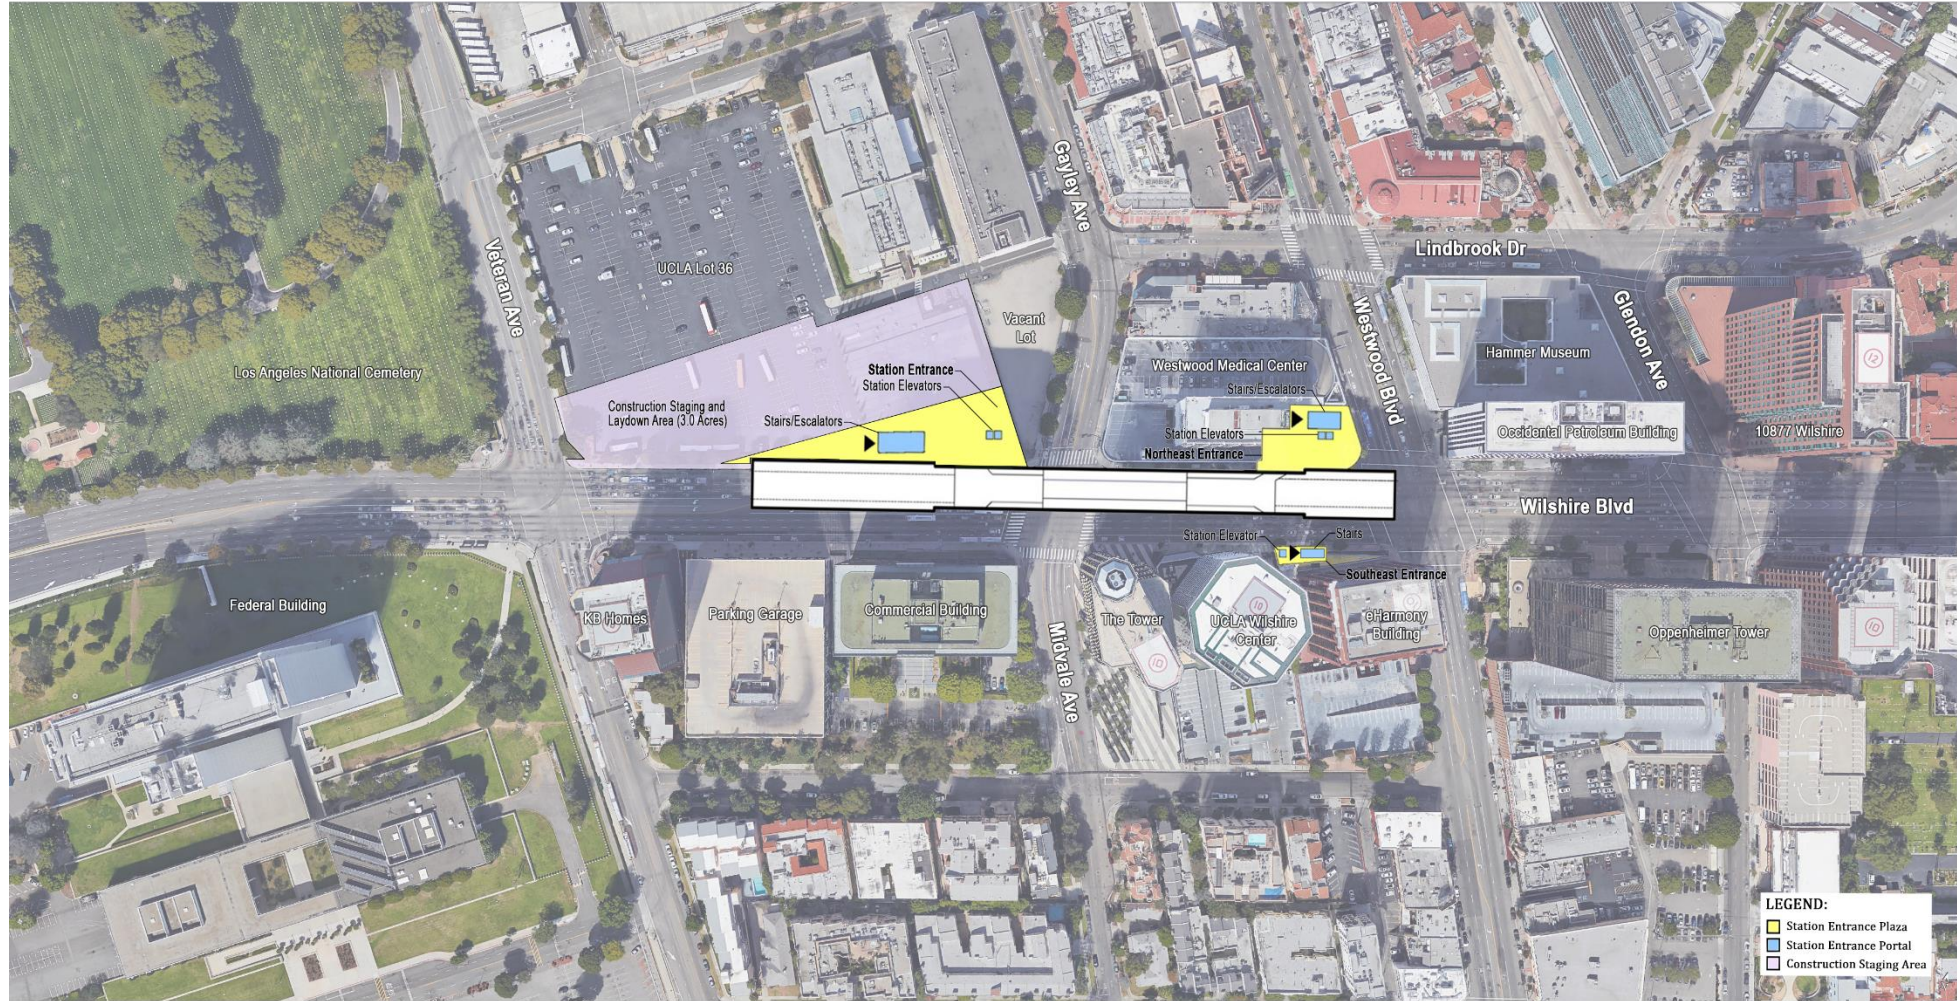


LEGEND:
■ Station Entrance Plaza
■ Station Entrance Portal
■ Construction Staging Area

Rendering shows length of the underground station box on Wilshire Bl between Westwood Bl and Veteran Av

Section 3 Tunnel From Century City to Westwood




Section 3 Tunneling Progress

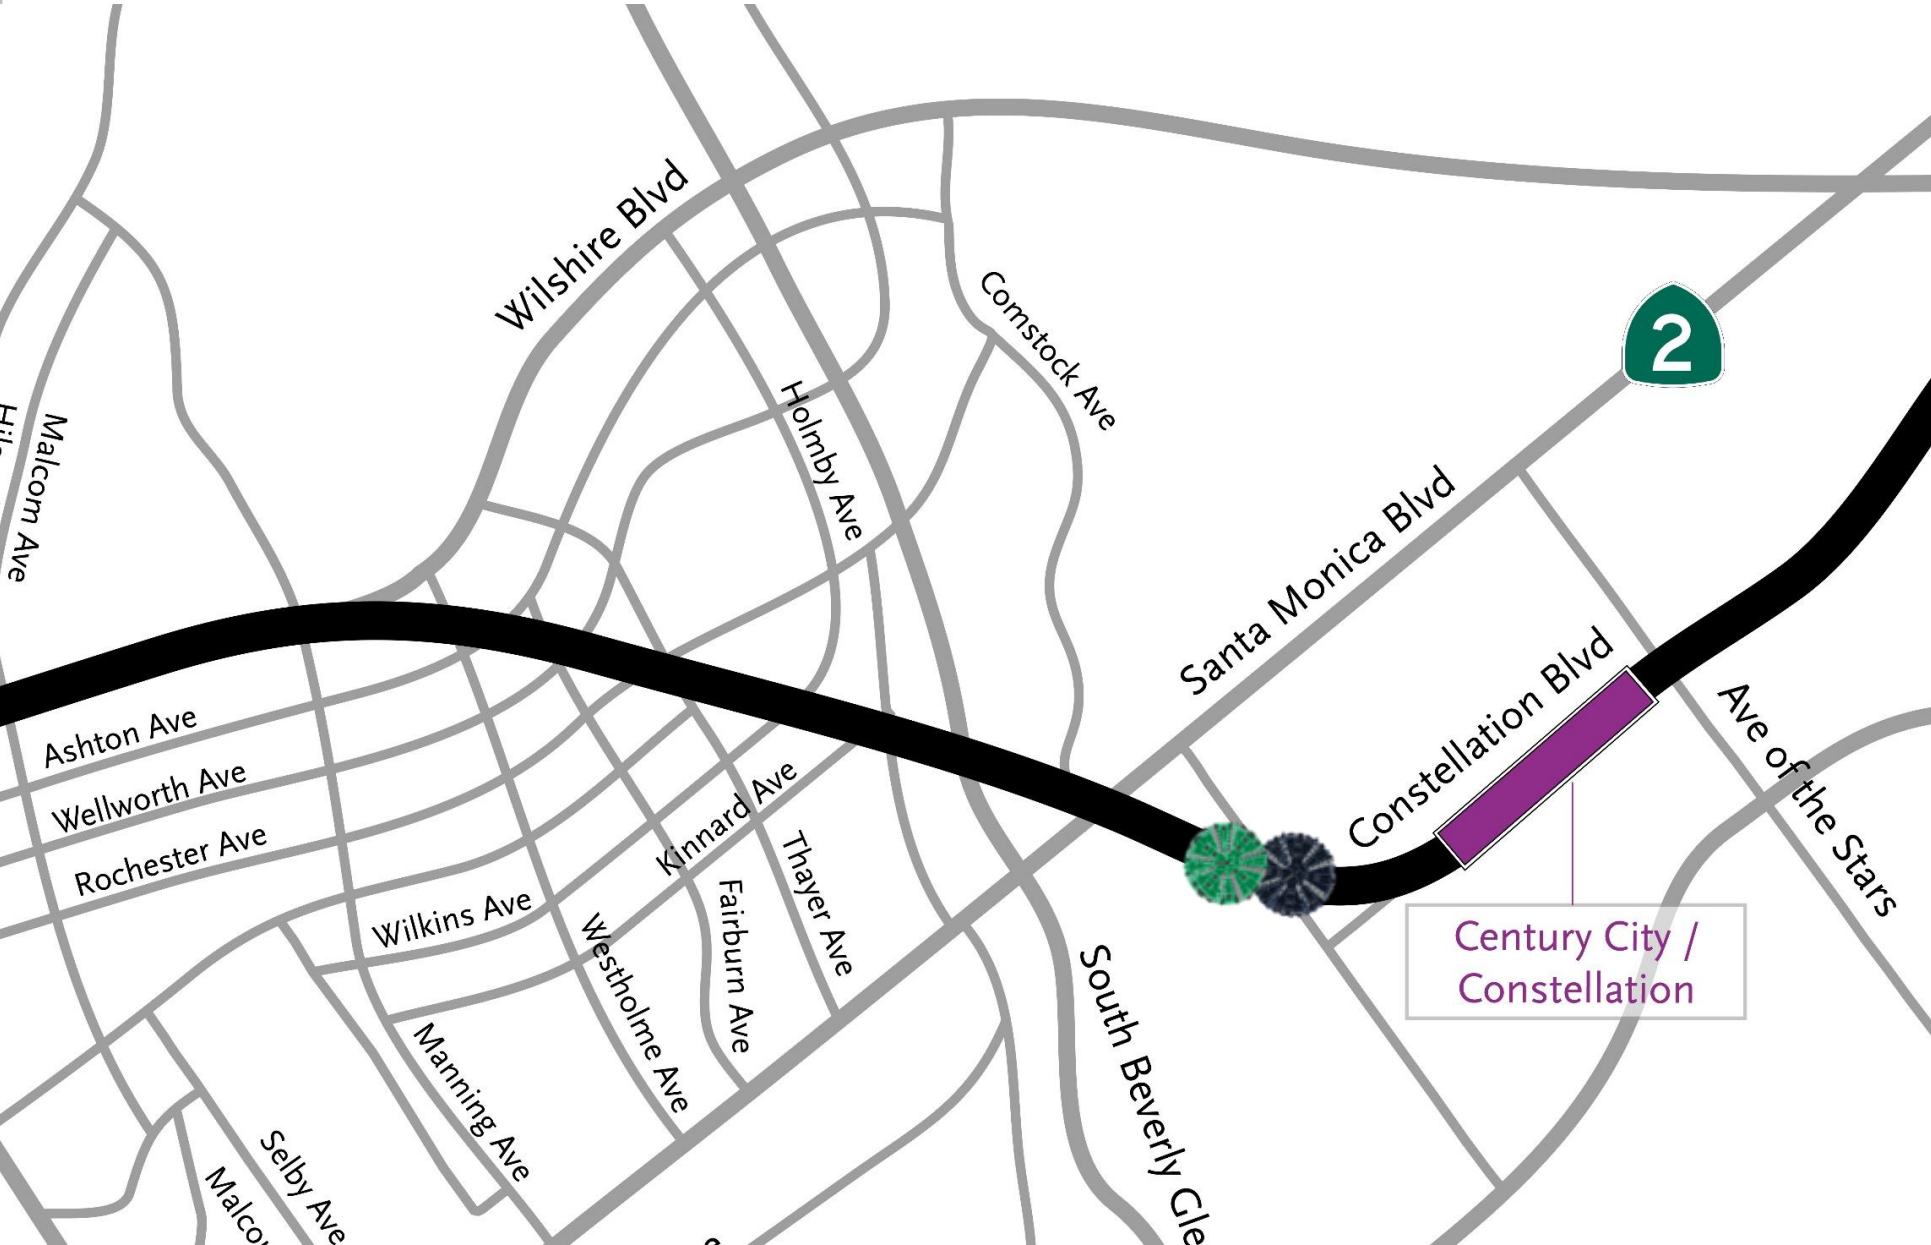


Tunneling Statistics as of 2/24/2023

Iris (TBM 1)

 12,507 feet
92% complete

Aura (TBM 2)

 12,327 feet
91% complete

 Future Station Boxes


Dewatering Wells on Wilshire Bl

The dewatering wells on Wilshire Bl will be used to construct and maintain the tunnel cross passages.

- Work will be done in stages.
- Noisy work will be done during the day.
- Utility service will not be interrupted.
- Access to driveways will be maintained.
- 5 locations along tunnel alignment - schedule TBD

Drilling on Wilshire Bl near Malcolm Av.

March 9 at 9pm through 6pm on March 11– Restriping and barrier setup.
March 13 to 31, 7am to 6pm- Drilling, installing wells, piping, and manholes.

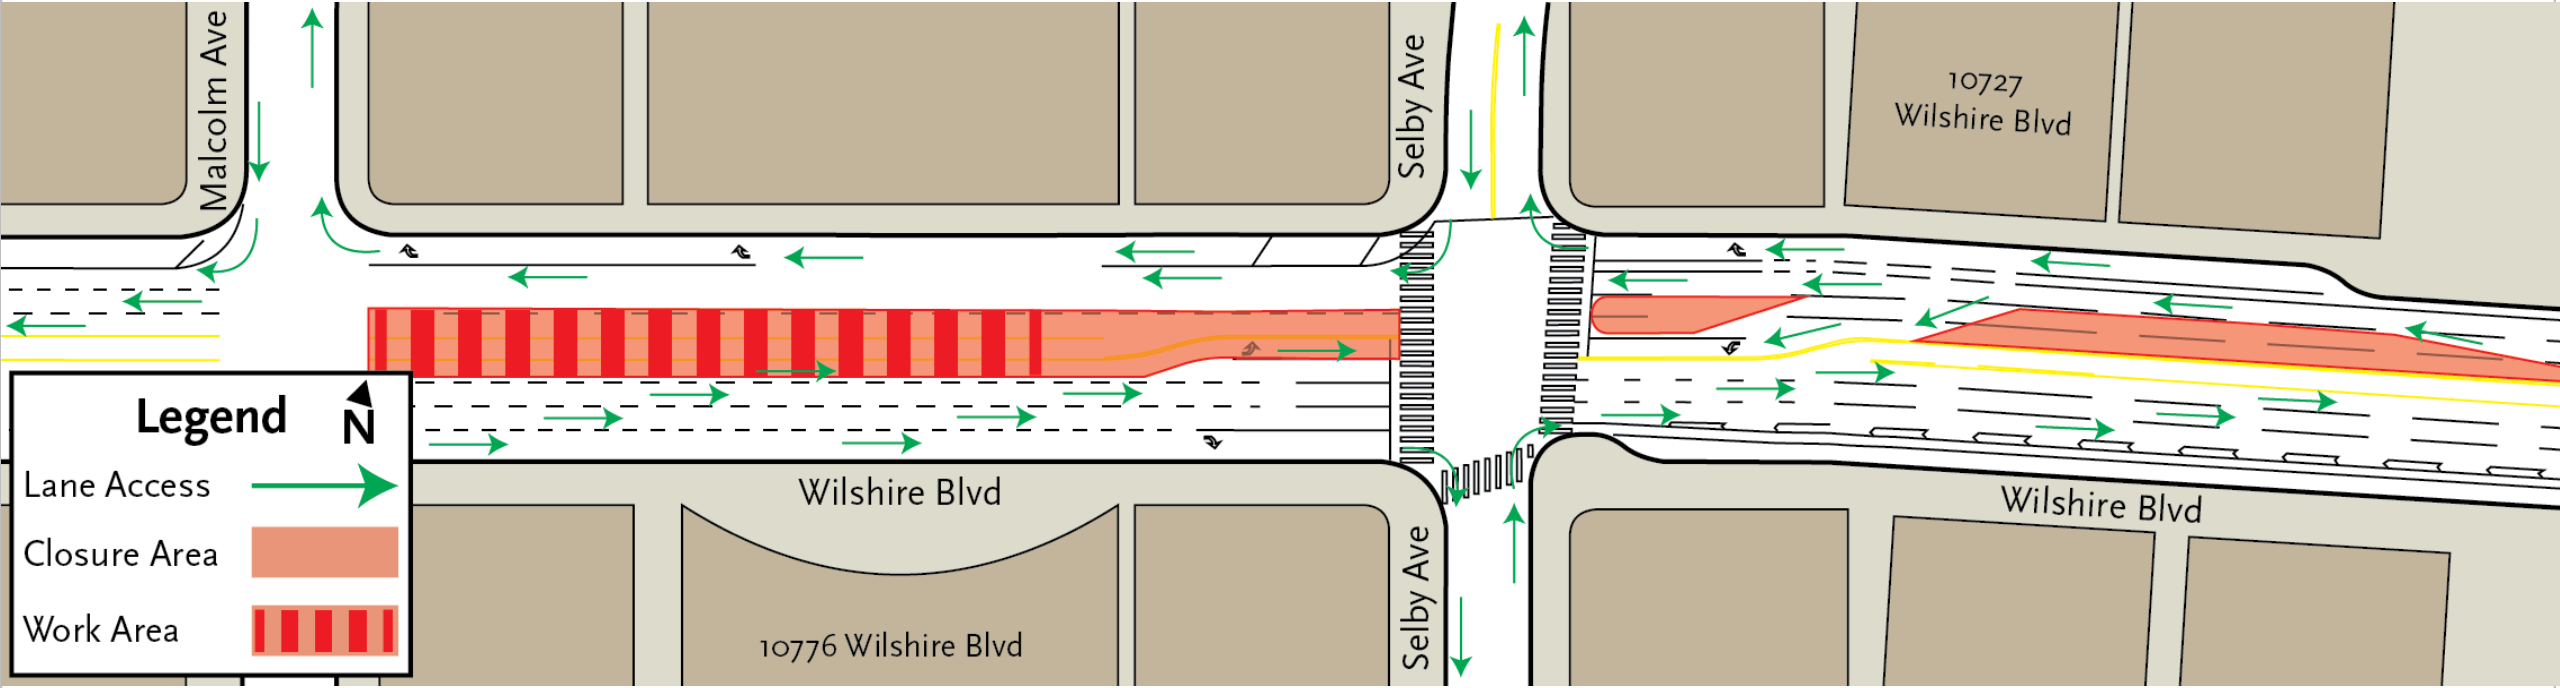


Access to driveways will be maintained.
Left turns may be restricted.



Sewer Lateral on Wilshire Bl near Malcolm Av

April 8, 9am to 3:30pm- Sewer lateral Installation
Utility service will not be interrupted.

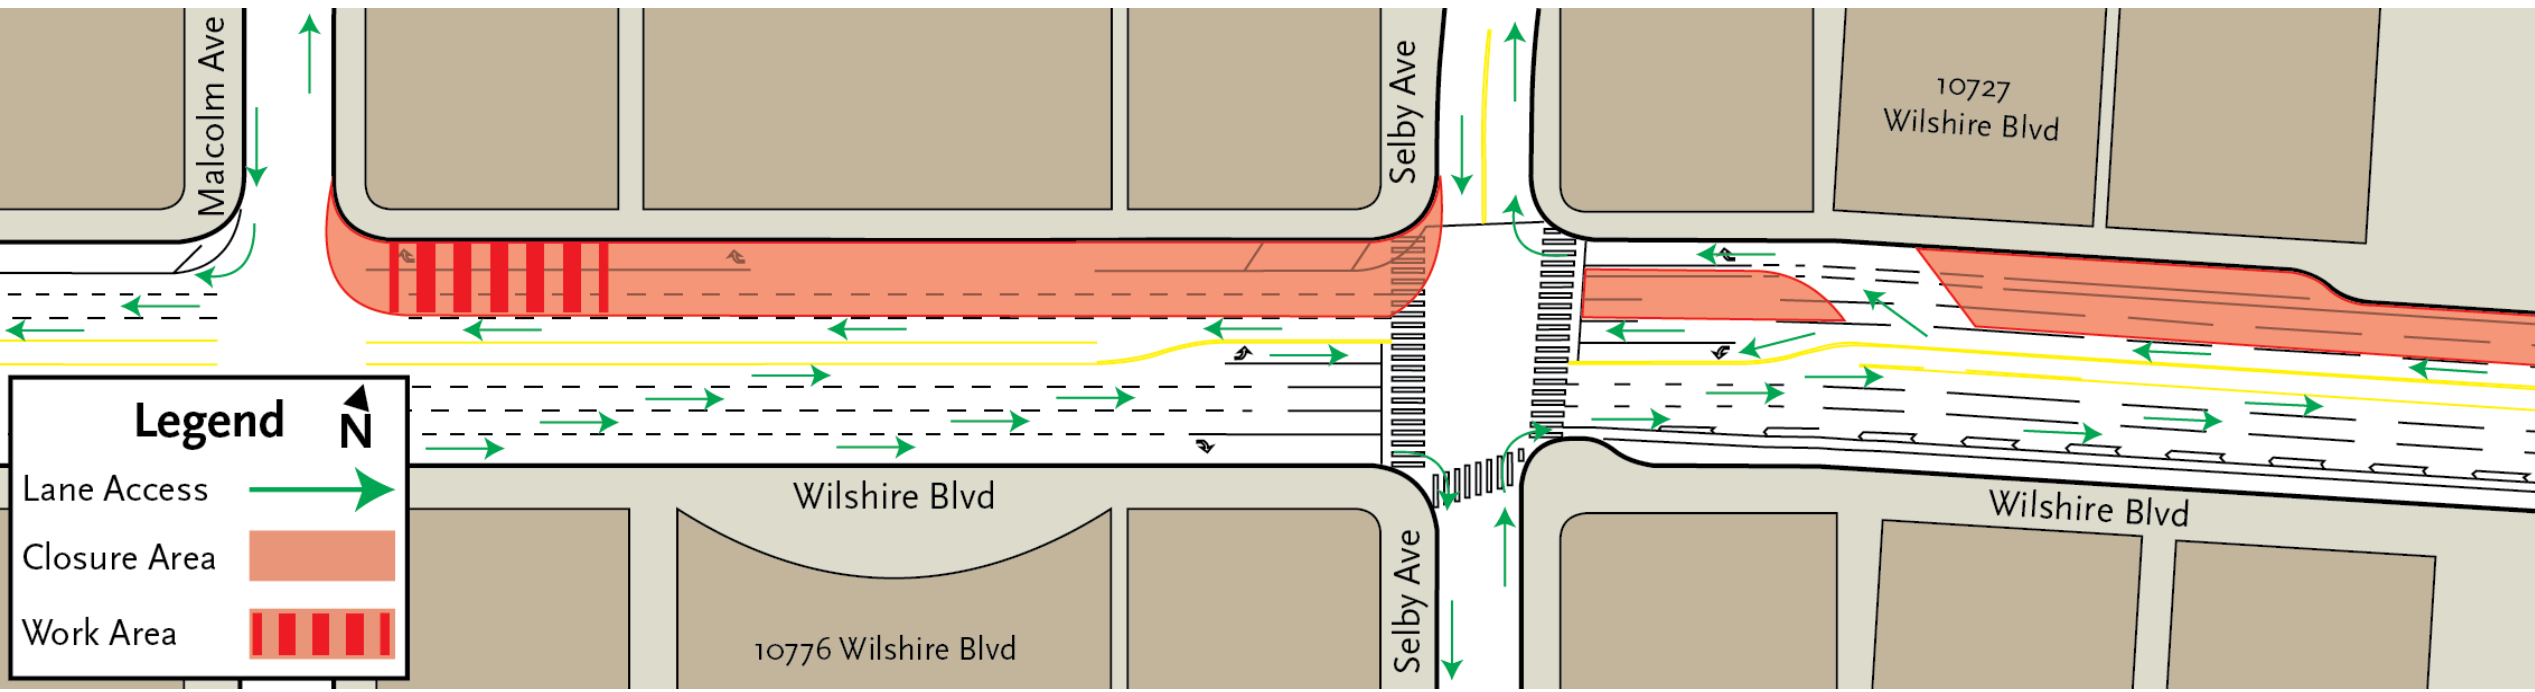


Access to driveways will be maintained.
Left turns may be restricted.



Generator in Center Median of Wilshire Bl

April 10, 24/7 for approximately 5 months – Generator in Median.

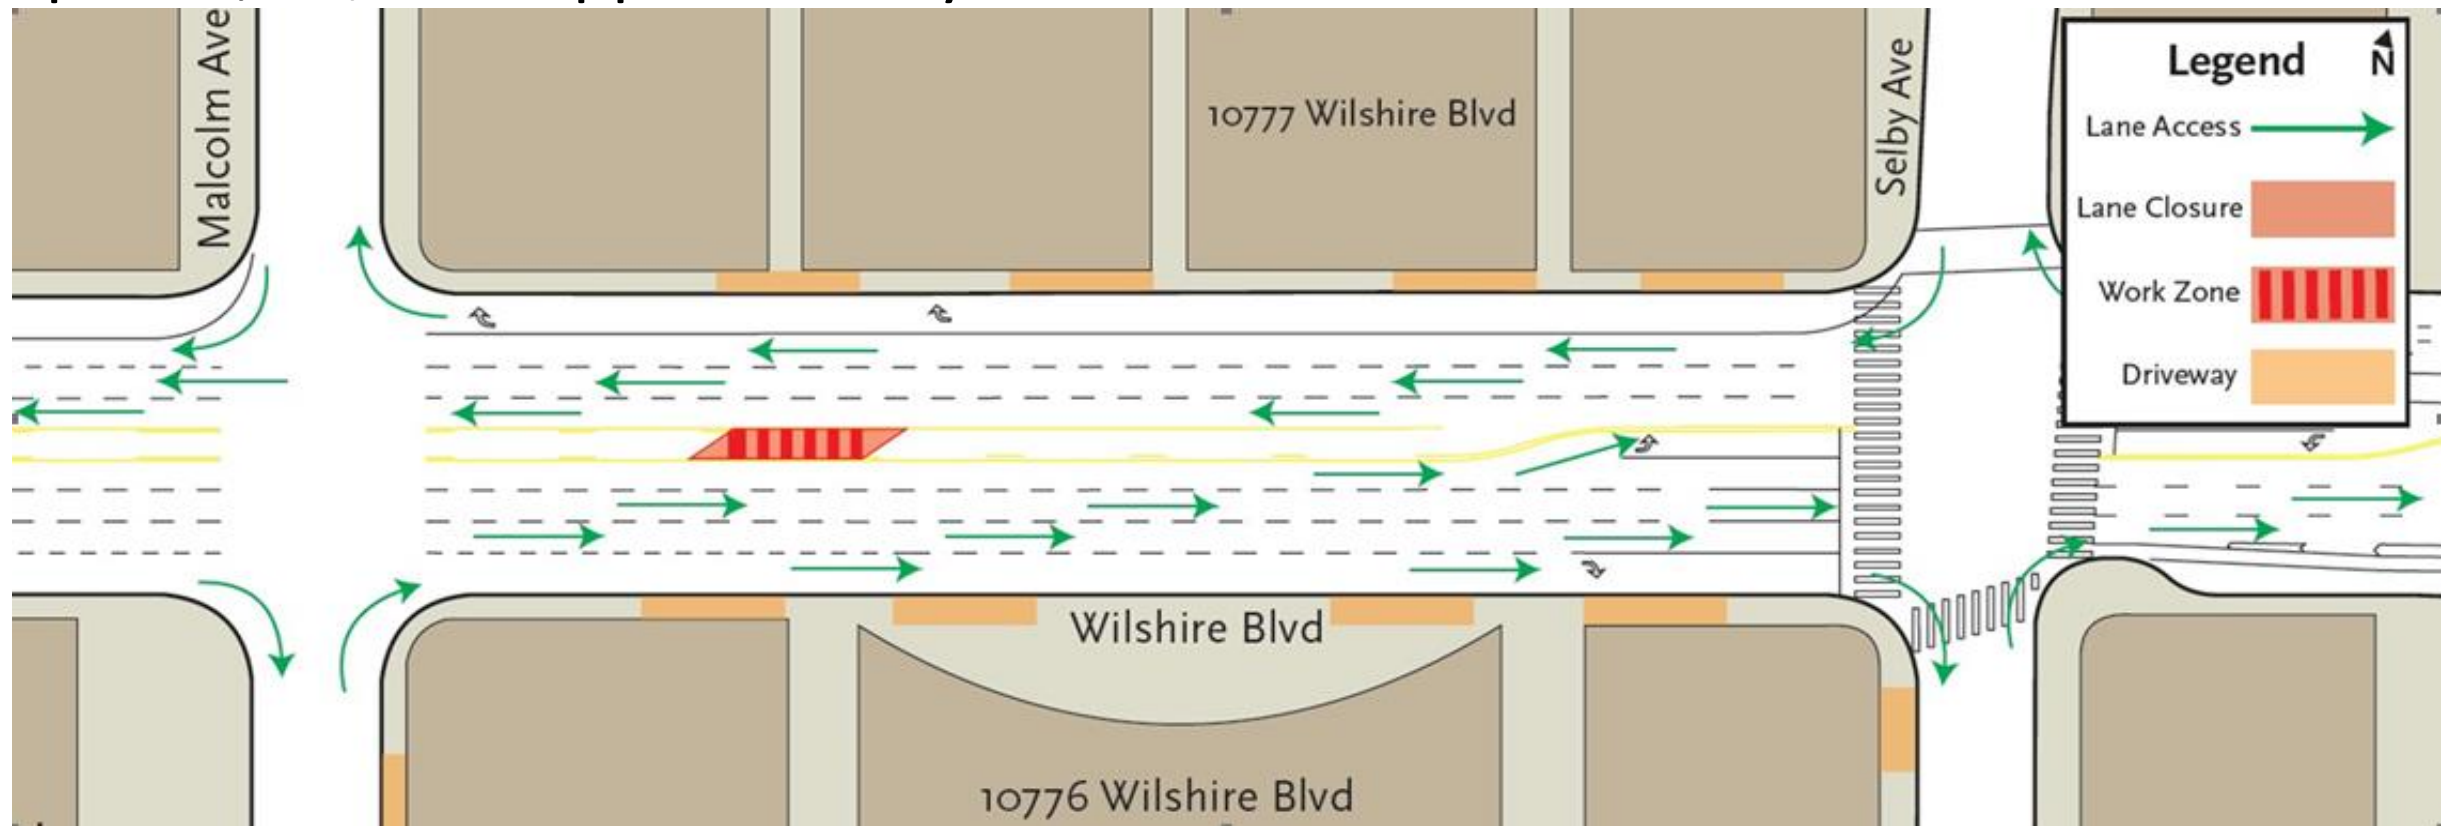

Wilshire Bl will have 3 lanes open in each direction.
Access to driveways will be maintained.
Left turns may be restricted.

Stay in Touch



213.922.6934



purplelineext@metro.net



metro.net/purple



@purplelineext



facebook.com/purplelineext