

EXECUTIVE SUMMARY

ES-1 Introduction

The Federal Transit Administration (FTA), in coordination with the Los Angeles County Metropolitan Transportation Authority (LACMTA or Metro) has prepared this Environmental Assessment (EA) under the National Environmental Policy Act (NEPA) for the Eastside Transit Corridor Phase 2 (Project). The Project includes the Build Alternative and the No Build Alternative and is described in detail in **Chapter 2.0** (Description of Alternatives) and **Appendix E** (Alternatives Considered and Project Description).

Metro proposes to extend the Metro E Line east from the current terminus at Atlantic Station to an at-grade terminal station at the Greenwood station in the City of Montebello. The Build Alternative includes the following key features:

- Approximately 4.7 miles of reconfigured and new light rail transit guideway
- One reconfigured and three new stations
- Facilities to support rail operations constructed near the alignment (e.g., traction power substation, train control houses, radio communications)
- A modification to existing tracks west of the proposed alignment extension (Maravilla Crossover)
- One maintenance and storage facility (MSF)

Relying upon the requirements under NEPA, as revised by the Building United States Infrastructure through Limited Delays and Efficient Reviews Act of 2023, and 23 Code of Federal Regulations (CFR) Part 771, effective July 3, 2025, this EA analyzes reasonably foreseeable effects that result from the Project. As discussed in **Chapter 3.0** (Affected Environment and Environmental Consequences), reasonably foreseeable effects are those effects that have a rational link to the Project in terms of geographic and temporal proximity, and must be sufficiently likely to occur. Reasonably foreseeable effects do not include effects that are speculative in nature or causally attenuated from the Project.

Unless otherwise defined in the resource-specific section of the EA, for the purposes of assessing reasonably foreseeable effects, the following parameters apply:

- Geographic proximity includes effects as described in **Section 3.1.1** of this EA. The Study Area extends 0.5 to 2 miles from the centerline of the Build Alternative's guideway; it encompasses the Cities of Commerce and Montebello, the community of East Los Angeles in unincorporated Los Angeles County, and a small portion of Monterey Park to the northwest. For some environmental resource topics, specialized study areas are geographical boundaries designed to analyze a specific environmental, social, or technical impact. **Appendix S** (Regulatory Setting Summary) summarizes federal, state, and local regulations for the individual environmental resource.
- The temporal scope for long-term effects is between 2025 (the year the EA for the Project was started) and 2050 (the horizon year for planned regional projects in operation). Temporary effects are expected to occur during Project construction and are described in **Section 3.17** (Construction). Project construction is anticipated to last approximately 60 to 84 months.
- Sufficiently likely to occur includes effects associated with other projects for which funding has been committed, including, for example, projects included in the fiscally-constrained list of projects in the Regional Transportation Plan with dedicated funding for construction.

Under NEPA, a proposed project is an activity that is subject to a federal action. This Project is subject to federal and state environmental review requirements pursuant to NEPA and California Environmental Quality Act (CEQA). FTA is the lead agency for NEPA, as Metro plans to seek federal funding for the Project from FTA. Metro is the lead agency under CEQA.

ES-1.1 Project Background

Since 2007, Metro has implemented a comprehensive outreach program and alternative selection process for the Project, including extensive public outreach comprised of community meetings, workshops, open houses, and public hearings throughout each phase of environmental review. Additional details on the Project background, alternative screening and selection process, and environmental review process are provided in **Chapter 2.0** and **Appendix E**, of this EA. The outreach efforts are described in more detail in **Chapter 5.0** (Public Involvement) and **Appendix Q** (Public Outreach Report).

ES-2 Purpose and Need

The purpose of the Project is to reduce travel times for communities in eastern Los Angeles County and provide new multimodal connections to destinations within the greater Southern California region. By serving highly concentrated areas of employment, activity centers, and residential communities, the Project would expand economic opportunities and promote the growth of local economies, while supporting transit oriented community goals and addressing the travel needs of transit dependent populations. It would enhance regional connectivity by providing new and faster multimodal options and lead to economic development and infill growth opportunities throughout eastern Los Angeles County.

The Build Alternative addresses the transportation needs of eastern Los Angeles County communities which face high population and employment growth and constrained transportation facilities. Future population and employment growth will contribute to increases in travel demand which, if unaddressed, will overwhelm existing and future transportation networks, impact goods movement, and exceed transit capacities in eastern Los Angeles County. The Build Alternative is needed to address growing population and employment densities, congestion impacts on bus transit and vehicle travel, quality of life, and high transit demand within the Study Area. See **Chapter 1.0** of this EA for additional information.

ES-3 Alternatives

ES-3.1 No Build Alternative

The No Build Alternative evaluates the reasonably foreseeable effects within the Study Area if the Build Alternative is not approved. The No Build Alternative would maintain existing transit service through the year 2050. No new transportation infrastructure would be built within Los Angeles aside from projects currently under construction or funded for construction and operation by 2050 via the 2008 Measure R or 2016 Measure M sales taxes. The No Build Alternative would include existing transit and roadway projects from the base year (2025) and planned transit projects currently under construction or funded for construction that would be in operation by the horizon year (2050). The No Build Alternative is used for comparison purposes to assess the relative benefits and effects of constructing a new transit project in the Study Area versus implementing only currently planned and funded projects that serve the greater Los Angeles County region. The No Build Alternative evaluates the reasonably foreseeable effects that would be expected to occur within the Project's geographic proximity and temporal scope described in **Section ES-1** and **Chapter 3.0** if the Build Alternative were not implemented. The No Build Alternative is required for comparison under NEPA.

The No Build Alternative would not provide a rail transit option for communities in eastern Los Angeles County and, therefore, would not satisfy the purpose of the Build Alternative. The No Build Alternative would not address growing population and employment densities, local and arterial roadway congestion, quality of life issues, or high transit demand in the Study Area; therefore, the No Build Alternative would not satisfy the Build Alternative's need.


ES-3.2 Build Alternative

The Build Alternative is an electric-powered light rail transit service extension in eastern Los Angeles County. It would include approximately 4.7 miles of reconfigured and new light rail transit guideway, extending the Metro E Line east from its current terminus at Atlantic Boulevard to an at-grade terminal station at the proposed Greenwood station in the City of Montebello. The 4.7 mile alignment would include the reconfiguration of 0.4 mile of existing track to transition to a new 4.3 mile extension. This alternative would have approximately 3.1 miles of underground alignment, 0.9 miles of aerial alignment, and 0.7 miles of at-grade alignment; a relocated underground Atlantic/Pomona station; and three new stations. The Build Alternative would also include facilities to support vehicle operations, such as overhead catenary systems, radio communications, and train control houses that would be constructed along the alignment; a modification to existing tracks west of the proposed alignment extension (Maravilla Crossover); and one MSF. The MSF would either be located in the City of Montebello (MSF Site 1 or 2) or in the City of Commerce (MSF Site 3), as shown in **Figure ES.1**.

The Build Alternative would construct a light rail transit option for communities in eastern Los Angeles County, enhancing regional connectivity, improving mobility and increasing travel efficiencies, supporting transit dependent populations, promoting local economic growth, and serving high-density urban areas. The Build Alternative satisfies the purpose and need of the Eastside Transit Corridor Phase 2 Project because it would expand transit opportunities in eastern Los Angeles County, provide a transportation alternative to local and arterial roadways during periods of congestion, improve quality of life by enhancing mobility and access options, and serve a population with high transit demand.

ES-4 Summary of Environmental Consequences and Mitigation Measures

Table ES.1 provides a summary of the Build Alternative's reasonably foreseeable environmental effects and the NEPA project measures (NPM) and/or NEPA mitigation measures (NMM) that would be implemented to address the Build Alternative's reasonably foreseeable permanent and temporary effects on the environment. NPMs and NMMs are identified for various resources. NPMs are incorporated as part of the Build Alternative to avoid or minimize potential adverse effects and consist of design features, best management practices, and measures required by law, including permit approvals. NMMs are additional actions, not otherwise part of the Build Alternative, that are designed to minimize, reduce, or compensate for reasonably foreseeable adverse effects. **Chapter 3.0** of the EA provides more detailed information and analysis about the Build Alternative's reasonably foreseeable environmental effects. **Appendix D** (Environmental Commitments Record) is a record of all NPMs and NMMs.

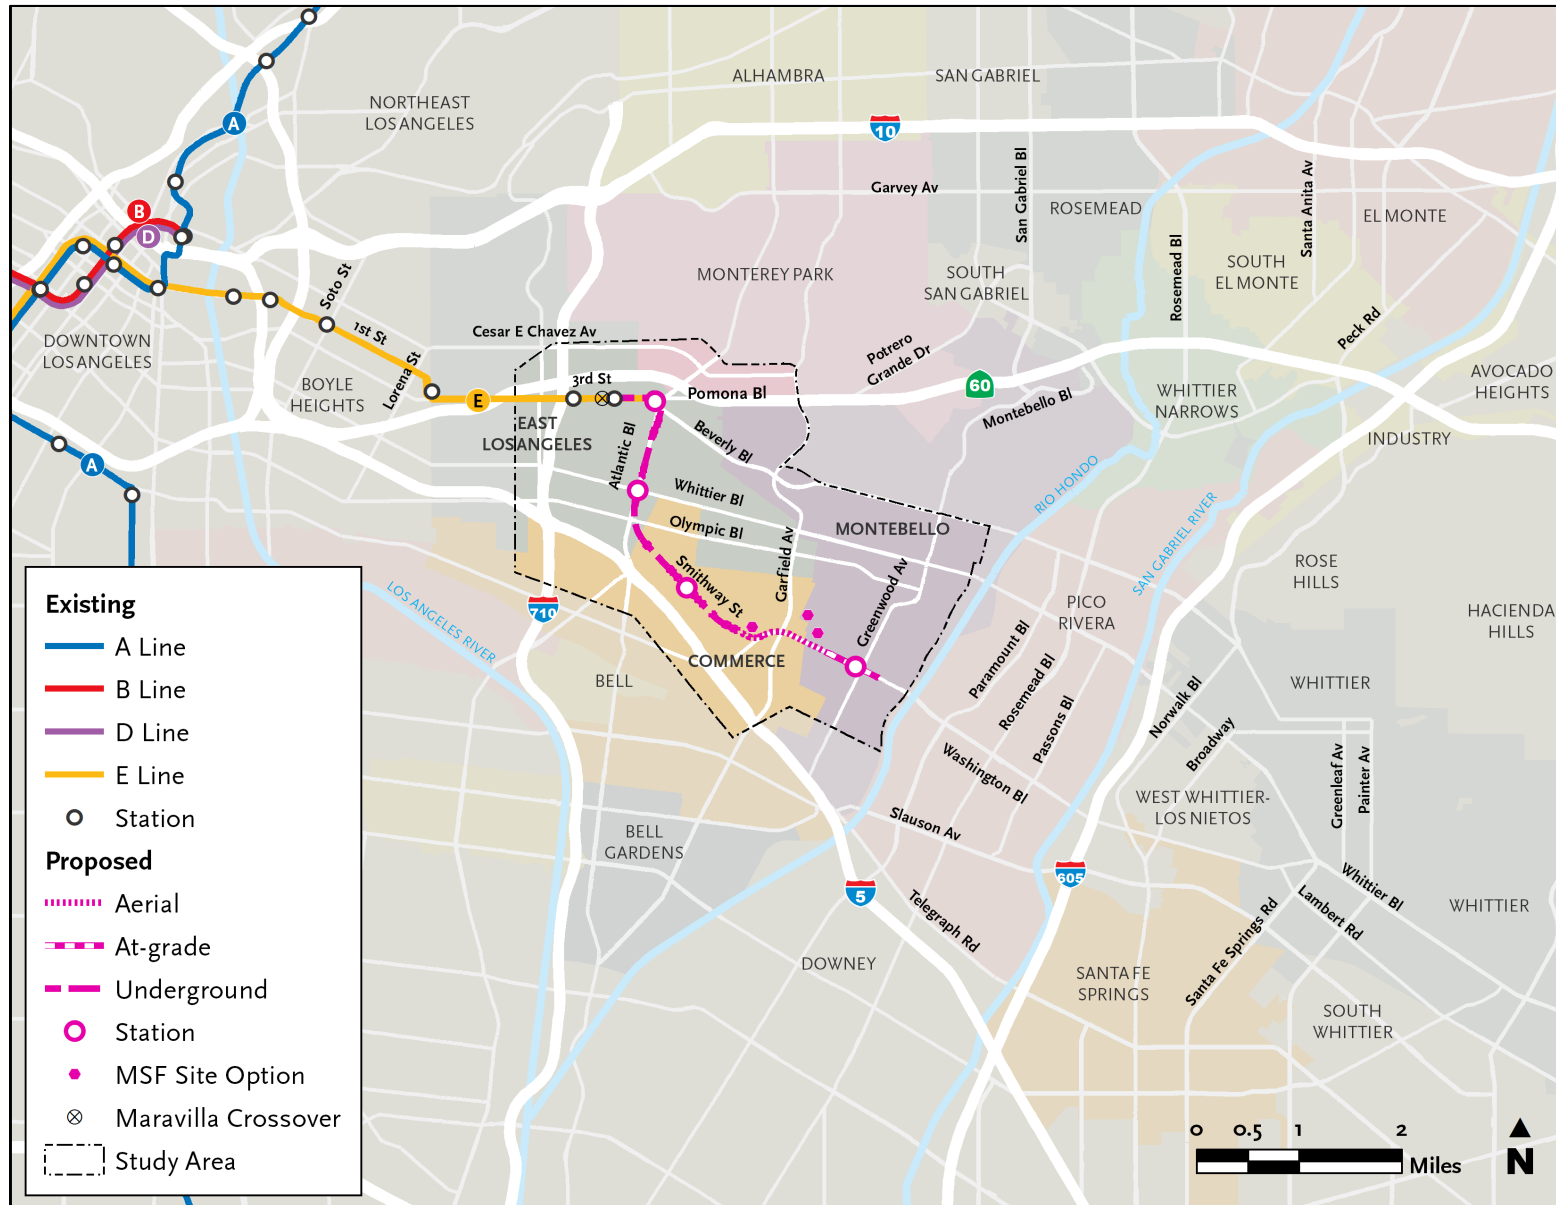

Source: Metro; CDM Smith/AECOM JV 2026.

Figure ES.1 Study Area

Table ES.1 Summary of Environmental Effects

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Air Quality	<p>Long-Term: The Build Alternative would be consistent with transportation plans and programs. There would be no potential for operation of the Build Alternative to generate a carbon monoxide or particulate matter hotspot. Emissions of all relevant criteria pollutants and precursors, except for volatile organic compounds, would be reduced as a result of the Build Alternative. The increase in volatile organic compounds would not exceed South Coast Air Quality Management District’s regional emissions threshold levels (see Appendix F [Air Quality Impacts Report]) and there would be no potential for operational emissions to violate air quality standards. The Build Alternative would decrease vehicle miles traveled (VMT) compared to existing conditions, resulting in long-term benefits on air quality.</p> <p>Short-Term/Construction: Emissions during construction would be temporary and would not exceed the South Coast Air Quality Management District’s regional construction emissions thresholds or localized significance thresholds. Construction would not be expected to result in emissions in any one location for 5 years or more; thus, construction emissions would not be expected to meaningfully affect long-term ambient concentrations and no quantitative particulate matter hot spots analysis is required. No adverse effect would occur.</p> <p>On March 24, 2026, the Transportation Conformity Working Group reviewed and determined that the Build Alternative is not a Project of Air Quality Concern and would not have adverse impacts on air quality. The Build Alternative meets the requirements of the Clean Air Act and 40 CFR 93.116.</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>	<p>No avoidance, minimization, or mitigation measures are needed to address construction or operational effects on this resource.</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>
Biological Resources (Migratory Birds)	<p>Long-Term: Disturbing vegetation during the bird nesting season could disrupt migratory bird nesting activities. However, long-term vegetation disturbance would primarily be from maintenance tree trimming, which is expected to be minimal. Additionally, the Build Alternative would comply with the Migratory Bird Treaty Act, which protects against the take of migratory birds. Therefore, there would be no long-term adverse effect on migratory birds.</p> <p>Short-Term/Construction: Street trees and landscape vegetation could be affected by construction and maintenance activities during the 3-year tree establishment period. If vegetation disturbance occurs during the bird nesting season, it could adversely affect migratory birds by disrupting nesting activities. The Build Alternative would comply with the Migratory Bird Treaty Act, Metro’s tree policy, and tree protection policies of the corridor jurisdictions, which include provisions for tree protection and replanting during construction. Implementation of NMM BIO-1, which requires nesting bird surveys and avoidance of active nests during the bird nesting season, would reduce adverse effects on migratory birds during the construction and tree establishment period.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: None</p> <p>Short-Term/Construction: NMM BIO-1 - Nesting Birds</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Biological Resources (Vegetation)	<p>Long-Term: Vegetation communities do not exist within the Biological Resources Study Area. Any tree-related maintenance activities would comply with the Metro Tree Policy and local tree protection policies. Thus, vegetation would not be affected by long-term maintenance activities.</p> <p>Short-Term/Construction: Street trees and landscape vegetation could be affected by construction activities; however, Metro would comply with its tree policy and local tree protection policies, which include provisions for tree protection and replanting during construction, and care of planted trees during the 3-year tree establishment period.</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>	<p>No avoidance, minimization, or mitigation measures are needed to address construction or operational effects on this resource.</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>
Biological Resources (Invasive Species and Pathogens)	<p>Long-Term and Short-Term/Construction: Equipment for construction and maintenance activities has the potential to transport invasive plant seeds in areas of exposed soil and spread tree disease pathogens. The Biological Resources Study Area is primarily built out with minimal landscaping, isolated street trees, and no vegetation communities. Thus, there would be limited potential to spread invasive species and tree disease pathogens.</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>	<p>No avoidance, minimization, or mitigation measures are needed to address construction or operational effects on this resource.</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>
Community Impacts (Neighborhood Continuity)	<p>Long-Term: The Build Alternative would not result in adverse effects neighborhood continuity. The Build Alternative would provide benefits that would strengthen neighborhood continuity. Development of Metro-owned properties would be required to adhere to the Metro Joint Development and Transit Oriented Communities Policy as described in and set forth in NPM EFI-1. Metro would ensure these developments would be evaluated for possible affordable housing development or other transit supportive land use and align with housing and economic goals through standards planning reviews. Therefore, operation would not result in adverse effects.</p> <p>Short-Term/Construction: Traffic could potentially result in traffic delays near construction staging areas. Street closures would potentially physically divide established communities. However, street closures would be periodic and temporary. Construction best management practices as set forth in NPM TRA-2 would minimize these short-term disruptions to traffic and street closure disruption during construction. As set forth in NPM TRA-4, site access during construction to MSF Site 1, 2, or 3 and adjacent properties would be maintained and meet design requirements. However, there would be an adverse effect due to reduced access within communities, which could lower quality of life and increase isolation. These adverse effects would be reduced to not adverse with implementation of NMM TRA-2, which would require that access to important community facilities and neighborhood areas are maintained. Construction of the Build Alternative and MSF would result in temporary employment opportunities. However, construction workers would likely be sourced from the existing local labor pool and construction of the Build Alternative and MSF would not require construction of new housing to house workers. Construction-related air quality emissions would not exceed South Coast Air Quality Management</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: NPM EFI-1 - Metro Joint Development Program and Metro Pilot Local Hiring Initiative</p> <p>Short-Term/Construction: NPM NOI-2 - Construction Noise and Vibration Control NPM TRA-2 - Construction Best Management Practices for Transportation NPM TRA-4 - Construction Best Management Practices for the Maintenance and Storage Facility Regarding Transportation NMM NOI-1 - Construction Noise Plan and Noise Monitoring Plan</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
	District’s regional construction emissions threshold levels (see Appendix F). Noise and vibration impacts would be reduced with implementation of measures identified in NPM NOI-2 and adverse effects would be reduced to not adverse with implementation of NMM NOI-1 through NMM NOI-10, NMM NOI-13, and NMM NOI-14 (see Appendix L [Noise and Vibration Impacts Report]).		NMM NOI-2 - Cast-in-Drilled-Hole Construction Methodology NMM NOI-3 - Noise Barriers NMM NOI-4 - Construction Staging Area NMM NOI-5 - Haul Routes NMM NOI-6 - Best Available Control Technologies NMM NOI-7 - Construction Working Hours NMM NOI-8 - Public Notification of Construction Operations and Schedules NMM NOI-9 - Truck Staging NMM NOI-10 - Tunnel Vent Fans Away From Residences NMM NOI-13 - Identify Vibration Susceptible Properties NMM NOI-14 - Vibration Pre-Construction Survey and Control Plan NMM TRA-2 - Traffic Management Plan	

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Community Impacts (Physical Character)	<p>Long-Term: The Build Alternative would not result in adverse effects on physical character. The underground alignment would not change the physical character of surrounding surface land uses. The aerial alignment would be visually congruent with surrounding industrial and commercial land uses. The at-grade alignment and facilities would comply with the Systemwide Station Design Standards and integrate with the existing character of the surrounding land uses. The Build Alternative would require acquisition of commercial and industrial properties. Metro would provide relocation services and payments per the Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, and access to these properties at a new location would be maintained in the long term.</p> <p>Short-Term/Construction: Potential street closures could potentially physically divide established communities. However, street closures would be periodic and temporary. NPM TRA-2 would be implemented to minimize street closure disruption during construction. As required by NPM TRA-4, site access to MSF Site 1 and adjacent properties would be maintained and meet design requirements. However, there would be an adverse effect due to street closures potentially physically dividing established communities. These adverse effects would be reduced to not adverse with implementation of NMM TRA-2, which would minimize street closure disruptions during construction and maintain access within and between established communities.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term /Construction: Adverse Effect</p>	<p>Long-Term: None</p> <p>Short-Term/Construction: NPM TRA-2 - Construction Best Management Practices for Transportation NPM TRA-4 - Construction Best Management Practices for the Maintenance and Storage Facility Regarding Transportation NMM TRA-2 - Traffic Management Plan</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term /Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Community Impacts (Access and Mobility)	<p>Long-Term: The Build Alternative is anticipated to alter public access and mobility within and between communities and neighborhoods. The open trench on 3rd Street, and aerial and at-grade alignments, including the tail tracks ending at Montebello Boulevard, would eliminate left-turns and crossings at unsignalized intersections. Impacts would be reduced through the implementation of NPM TRA-1, which would implement best practice safety measures such as curbs, barriers, and signage crossings. As required by NPM TRA-3, site access during operations to MSF Site 1, 2, or 3 and adjacent properties would be maintained and meet design requirements. However, an adverse effect on access and mobility would still occur at the intersection of Garfield Avenue and Washington Boulevard because a reduction in travel lanes would result in an unacceptable level of service. Implementation of NMM TRA-1, which would install a new left turn lane and reconfigured right turn lane at this intersection, would reduce adverse effects to not adverse. Benefits of the Build Alternative include improved transit access, reduced automobile reliance and congestion, increased bicycle and pedestrian access, and enhanced mobility within and between communities overall. The Build Alternative would improve transit mobility in the Study Area by reducing transit travel times and improving connectivity between eastern Los Angeles County communities and the greater Southern California region.</p> <p>Short-Term/Construction: Temporary and periodic street and sidewalk closures could be required during construction activities. As identified in NPM TRA-2, lane and/or road closures would be scheduled to minimize disruptions to circulation patterns. As required by NPM TRA-4, site access during construction to MSF Site 1 or 2 and adjacent properties would be maintained and meet design requirements and alternative routes would be available for any streets requiring closure. However, there would be an adverse effect due to street closures impacting access and mobility within and between communities. As required by NMM TRA-2, the Traffic Management Plan specifies measures to minimize disruption to access and mobility during construction and would require that access to important community facilities and neighborhood areas is maintained. Therefore, with implementation of NMM TRA-2, construction adverse effects associated with street closures would be reduced to not adverse.</p>	<p>Long-Term: Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: NPM TRA-1 - Operational Best Management Practices for Transportation NPM TRA-3 - Operational Best Management Practices for the Maintenance and Storage Facility Regarding Transportation NMM TRA-1 - Garfield Avenue and Washington Boulevard Intersection</p> <p>Short-Term/Construction: NPM TRA-2 - Construction Best Management Practices for Transportation NPM TRA-4 - Construction Best Management Practices for the Maintenance and Storage Facility Regarding Transportation NMM TRA-2 - Traffic Management Plan</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Community Impacts (Parks)	<p>Long-Term: The Build Alternative would not result in adverse effects on parks. Operation of the Build Alternative would not require any physical acquisition, displacement, alteration, or relocation of parks within the Community Facilities and Public Services Study Area. Under the Build Alternative, the existing at-grade guideway would transition to the underground guideway within a trench along 3rd Street. This could potentially impact access to Belvedere Park Lake. However, U-turns would be allowed at Mednick Avenue and Woods Avenue. Additionally, a new high-visibility crosswalk would be constructed across 3rd Street to Belvedere Park Lake and other facilities. Left turns would be eliminated to and from Civic Center Way; however, the pedestrian crossing would be maintained.</p> <p>Short-Term/Construction: Intermittent increases in noise, dust, odors, and traffic delays could occur, which could affect adjacent parks. However, these impacts would not be adverse with implementation of standard control and noise and vibration mitigation measures. Implementation of NPM TRA-2 would minimize disruptions to the public caused by temporary closures. However, there would be an adverse effect due to intermittent closures and detours during construction, which could inhibit access to parks. Implementation of NMM TRA-2 would maintain mobility and access to local facilities and adverse effects associated with closures and detours would be reduced to not adverse.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: None</p> <p>Short-Term/Construction: NPM TRA-2 - Construction Best Management Practices for Transportation NMM TRA-2 - Traffic Management Plan</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>
Community Impacts (Multi-Use Trails)	<p>Long-Term: The Build Alternative would not result in adverse effects on multi-use trails as there are none within the Community Facilities and Public Services Study Area.</p> <p>Short-Term/Construction: Traffic could potentially delay access to the multi-use trails located east of the Study Area from Washington Boulevard. As identified in NPM TRA-2, Metro standard practices shall include timing closures to minimize disruptions to the public. With implementation of NMM TRA-2, the Build Alternative would require development of a Traffic Management Plan to maintain mobility and access to local facilities, and construction adverse effects associated with closures and detours would be reduced to not adverse.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: None</p> <p>Short-Term/Construction: NPM TRA-2 - Construction Best Management Practices for Transportation NMM TRA-2 - Traffic Management Plan</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Community Impacts (Other Community Facilities)	<p>Long-Term: The Build Alternative would not result in adverse effects on other community facilities. Operation of the Build Alternative would not require any physical acquisition, displacement, alteration, or relocation of fire, police, emergency service, or school facilities. The trench guideway along 3rd Street could potentially impact access to and from the East Los Angeles Civic Center and Library. Left turns would be eliminated to and from Civic Center Way; however, the pedestrian crossing would be maintained. Additionally, vehicle access to the Civic Center from Mednick Avenue and U-turns at Mednick Avenue and Woods Avenue would be available. A new high-visibility crosswalk east of La Verne Avenue would be constructed to provide pedestrian access across 3rd Street.</p> <p>Short-Term/Construction: Traffic could potentially result in traffic delays and thus hinder access to other community facilities. As identified in NPM TRA-2, Metro standard practices would include timing closures to minimize disruptions to the public. For construction of the MSF, access to nearby properties and alternative routes would be available for any streets requiring closures as set forth in NPM TRA-4. However, there would be an adverse effect due to street closures inhibiting access to other community facilities. With implementation of NMM TRA-2, the Build Alternative would require development of a Traffic Management Plan to maintain mobility and access to local facilities, and construction adverse effects associated with closures and detours would be reduced to not adverse.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: None</p> <p>Short-Term/Construction: NPM TRA-2 - Construction Best Management Practices for Transportation NPM TRA-4 - Construction Best Management Practices for the Maintenance and Storage Facility Regarding Transportation NMM TRA-2 - Traffic Management Plan</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>
Historic, Archeological, and Tribal Resources (Historic Properties)	<p>Long-Term: Maximum vibration levels at historic properties along the Build Alternative are predicted to be 68 vibration decibels. Due to the strategic location of switches, none of the vibration levels at historic properties are predicted to exceed the FTA frequent impact criteria along the Build Alternative. Construction of the Build Alternative would acquire and demolish six contributors to the Vail Field Industrial Addition historic district, which could result in a long-term effect on the historic district. However, none of these contributors are individually eligible historic properties. The six contributors are located near the center and on the periphery of the historic district, though their demolition would not alter the district's character defining features. The core would remain intact with enough contributors with characteristics to convey its historical significance. The Build Alternative would not diminish the integrity of the historic properties' character defining features. As a result, there would be no adverse effect on historic properties from visual changes.</p> <p>Short-Term/Construction: Construction activities would not physically destroy, damage, alter, or move historic properties. The physical features within each property's setting that contribute to its historic significance would not change. New visual elements of the Build Alternative construction would be congruent with the surrounding industrial setting and would not diminish features of the historic properties. Effects on specific properties are summarized below.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: None</p> <p>Short-Term/Construction: NMM CUL-1 - Protection Measures – Differential Settlement/Vibration/Tunnel Boring Machine [TBM] Specifications for CVS Pharmacy [CVS]/Golden Gate Theater</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
	<p><u>National Chicano Moratorium March</u>: Construction would remove and replace the asphalt pavement along portions of the historic district’s contributing march route. A trench would be installed within the existing right-of-way at 3rd Street and La Verne Avenue. The Build Alternative would not result in the reconfiguration of the streets and sidewalks and the streets and sidewalk would continue to be constructed with asphalt and concrete. None of the district’s character-defining features or contributing elements would be demolished or altered. Therefore, the Build Alternative would have no adverse effect on the National Chicano Moratorium March route.</p> <p><u>Golden Gate Theater</u>: Construction of the guideway and station has the potential to cause vibrations and ground settlement that could impact the Golden Gate Theater, resulting in an adverse effect. Implementation of NMM CUL-1 would require building protection measures to be put in place, as identified in a pre-construction survey. NMM CUL-1 would reduce the potential for vibration-related adverse effects generated during construction activities to damage the Golden Gate Theater and there would be no adverse effect.</p> <p><u>Vail Field Industrial Addition Historic District</u>: Demolition of six contributors to the historic district would occur during construction. This would not alter the district’s character defining features and the core of the historic district would have characteristics to convey its historical significance. Therefore, the Build Alternative would have no adverse effect on the Vail Field Industrial Addition historic district.</p> <p><u>Pacific Metals Company Building</u>: The construction of the Build Alternative would introduce a new visual element but would not change the historic character of the building. The aerial guideway, while conspicuous, would be congruent with other railway infrastructure in the area. The Build Alternative would have no adverse effect on Pacific Metals Company building.</p> <p><u>MSF Site 2</u>: The aerial guideway would be within the parking lot of the Pacific Metals Company building but would not alter the building’s façade or diminish the integrity of the building’s significant design features. The E.F. Hauserman Company building would be within the vicinity of MSF Site 2. MSF Site 2 would introduce a new visual element but would not change the historic character of the building. Construction activities would not materially impair the historic property due to the distance from MSF Site 2 and its tail tracks. MSF Site 2 would have no adverse effect on historic properties.</p> <p><u>MSF Site 3</u>: MSF Site 3 would be located within the Vail Field historic district. Construction of the MSF would introduce a new visual element but the visual quality and character of the site would be consistent with the industrial nature of the historic district and would not have an adverse effect.</p>			

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Historic, Archeological, and Tribal Resources (Archaeological Resources)	<p>Long-Term: The Build Alternative would not physically demolish, destroy, relocate, or alter any known archaeological resources that are historic properties.</p> <p>Short-Term/Construction: The Build Alternative would have no effect on known archaeological resources within the Area of Potential Effects. However, construction could have the potential to disturb and destroy archaeological resources that are currently unknown. NMM CUL-2 requires that construction workers receive training on how to proceed if cultural resources are inadvertently discovered and that a Cultural Resources Monitoring and Mitigation Plan be prepared for unanticipated discoveries. Implementation of this mitigation would reduce adverse effects on archaeological resources to not adverse.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: None</p> <p>Short-Term/Construction: NMM CUL-2 - Unknown Archaeological Resources</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>
Historic, Archeological, and Tribal Resources (Traditional Cultural Properties)	<p>Long-Term: The Build Alternative would not require additional ground disturbance or other activities that could adversely affect Traditional Cultural Places.</p> <p>Short-Term/Construction: No precontact archaeological sites were identified through research, survey, and Native American consultation in the Area of Potential Effects; therefore, precise locations with a higher potential to contain such resources cannot be identified. If unmitigated, there could be a potential disturbance of Traditional Cultural Places that are currently unknown during construction, resulting in an adverse effect. Implementation of NMM TCP-1, NMM TCP-2, and NMM TCP-3 would ensure that workers have a clear understanding of Traditional Cultural Places that may be present in the construction area, and that procedures and plans would be in place for monitoring for and for safely handling Traditional Cultural Places. Implementation of NMM TCP-1 through NMM TCP-3 would reduce adverse effects to not adverse.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: None</p> <p>Short-Term/Construction: NMM TCP-1 - Traditional Cultural Places [TCP] Training NMM TCP-2 - Retain a Native American Monitor NMM TCP-3 - Unknown Traditional Cultural Places [TCP]</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Economic Impacts	<p>Long-Term: Build Alternative-related spending would provide economic benefits by generating additional wages and salaries for households and creating jobs for the Southern California region. Wages and benefits from operation of the Build Alternative would be greater for the metro area relative to the County.</p> <p>The Build Alternative would result in travel time savings and travel cost savings. The Build Alternative would save travelers’ travel time and attract additional riders relative to the No Build Alternative.</p> <p>The Build Alternative is expected to lead to new development and/or redevelopment of land surrounding some of the proposed stations, which would likely have the effect of increasing property tax revenues for affected local jurisdictions (i.e., Los Angeles County, City of Montebello and City of Commerce). Development of Metro-owned properties would be required to adhere to the Metro Joint Development Program and Metro Pilot Local Hiring Initiative as required by NPM EFI-1.</p> <p>While the Build Alternative would result in minor losses in the tax base and associated revenue, these effects would not be adverse. Moreover, the loss of tax revenue could potentially be offset by increased development near stations and along the Build Alternative alignment, which creates economic opportunity. Therefore, there would be no adverse effect.</p> <p>Short-Term/Construction: Build Alternative-related construction spending would provide regional economic benefits by generating additional wages and salaries for households and creating jobs for the region. General construction and soft costs/professional services expenditures and external funding sources would generate investment in the local economy and local employment. Construction of the Build Alternative would be required to adhere to the Metro Joint Development Program and Metro Pilot Local Hiring Initiative as required by NPM EFI-1.</p> <p>Construction could have temporary adverse economic effects on some commercial and industrial businesses, particularly near or adjacent to construction sites, including traffic disruption and air quality and noise effects. These construction effects could in turn result in a loss of sales and/or increased operating costs for commercial businesses. These businesses represent a relatively small portion of the overall economy. Therefore, there would be no adverse effect on the region.</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>	<p>Long-Term and Short-Term/Construction: NPM EFI-1 - Metro Joint Development Program and Metro Pilot Local Hiring Initiative</p>	<p>Long-Term: Beneficial Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Geology, Seismic, Soils, and Paleontological Resources (Exposure to Seismic Hazards)	<p>Long-Term and Short-Term/Construction: The Build Alternative is not on any known active faults capable of surface rupture, and is on generally flat, stable soils with low liquefaction potential. Because the Build Alternative is located in a seismically active area, there is potential for seismic ground shaking. To address potential seismic hazards, the Build Alternative would be constructed in compliance with the Metro Rail Design Criteria, applicable building codes, and standards as identified in NPM GEO-1. Compliance includes detailed requirements for planning and conducting a geotechnical investigation, geotechnical design methodologies, and reporting, such as the preliminary geotechnical investigation conducted in 2025. Specific structural engineering recommendations identified in the geotechnical investigations would be incorporated into the final design plans (NPM GEO-1). Thus, there would be no adverse effect.</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>	<p>Long-Term and Short-Term/Construction: NPM GEO-1 - Geotechnical Investigation</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>
Geology, Seismic, Soils, and Paleontological Resources (Soil Erosion)	<p>Long-Term: The Build Alternative is located in an urbanized area that is primarily impervious with no exposed soil. There would be no ground disturbance or change in the amount of exposed soil compared to existing conditions. A small increase in impervious surface would not lead to a meaningful change in the amount of runoff and associated erosion. The Build Alternative would comply with post-construction measures in applicable National Pollutant Discharge Elimination System permits and low impact development standards, as identified in NPM HWQ-1. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: Implementation of erosion control best management practices (BMPs), as identified in NPM HWQ-2, would prevent substantial soil erosion or the loss of topsoil from exposed soils. At the close of construction, areas of exposed soil that were previously paved would be repaved. Thus, there would be no adverse effect.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>	<p>Long-Term: NPM HWQ-1 - Operational Best Management Practices for Water Resources</p> <p>Short-Term/Construction: NPM HWQ-2 - Construction Best Management Practices for Water Resources</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>
Geology, Seismic, Soils, and Paleontological Resources (Soil Stability)	<p>Long-Term: The Build Alternative could affect and be affected by soil stability including hazards such as landslides, subsidence, liquefaction, or collapse. However, the Build Alternative would undergo a detailed geotechnical investigation and comply with regulatory requirements, as set forth in NPM GEO-1, which would identify and address potential soil stability issues. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: The Build Alternative would comply with regulatory requirements, as described in NPM GEO-1, and recommendations in a site-specific geotechnical investigation to avoid adverse effects from soil stability, including related to excavation and tunneling and dewatering. Thus, there would be no adverse effect.</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>	<p>Long-Term and Short-Term/Construction: NPM GEO-1 - Geotechnical Investigation</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Geology, Seismic, Soils, and Paleontological Resources (Expansive Soils)	<p>Long-Term: The Build Alternative could affect and be affected by expansive soils, which swell and shrink with moisture changes and have the potential to damage foundations, structures, and underground utilities. However, the Build Alternative would undergo geotechnical investigation and comply with regulatory requirements described in NPM GEO-1. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: The Build Alternative would comply with regulatory requirements, as described in NPM GEO-1, and recommendations in a site-specific geotechnical investigation to avoid adverse effects from expansive soil. Thus, there would be no adverse effect.</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>	<p>Long-Term and Short-Term/Construction: NPM GEO-1 - Geotechnical Investigation</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>
Geology, Seismic, Soils, and Paleontological Resources (Paleontological Resources)	<p>Long-Term: The Build Alternative would not involve any ground disturbance in the long term that could have an adverse effect on paleontological resources.</p> <p>Short-Term/Construction: The Build Alternative is in an area of high sensitivity for paleontological resources, and damage or loss of paleontological resources could occur during tunnel construction from the use of tunnel boring machines, which could likely prevent the discovery of fossil resources. With implementation of NMM GEO-1 through NMM GEO-4, which require inadvertent discovery protocols and fossil recovery measures to help preserve the scientific value of fossils that may be present, potential adverse effects on paleontological resources during construction would be reduced to not adverse.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: None</p> <p>Short-Term/Construction: NMM GEO-1 - Retaining a Qualified Paleontologist and a Qualified Paleontological Monitor NMM GEO-2 - Ability to Readily Salvage Fossils and Samples of Sediment NMM GEO-3 - Ability to Identify and Permanently Preserve Specimens NMM GEO-4 - Ability to Curate Specimen to a Professional Accredited Museum Repository</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Visual Resources	<p>Long-Term: No scenic vistas are present in the Study Area. Views of surrounding landscapes and topography are available but not considered unique or of visual significance nor substantially affected by the Build Alternative elements.</p> <p>The Build Alternative would mostly operate underground or within the public roadway right-of-way. Certain elements located on properties outside of the public right-of-way (e.g., station plazas, traction power substations) would comply with applicable zoning and design requirements.</p> <p>Operational visual changes would be limited and would not result in adverse effects on visual character, visual resources, visual quality, or viewers. New visual features such as station entries, plazas, and related at-grade facilities would be designed to integrate with the surrounding urban context. Viewer sensitivity ranges from low to moderate due to the existing presence of industrial uses and exposure by residents, park users, and transit riders. However, given the context-sensitive design of the Build Alternative elements, the visual effects of the Build Alternative would not be adverse.</p> <p>Visual effects on historic properties are discussed under Historic, Archeological, and Tribal Resources.</p> <p>Short-Term/Construction: Long-range views would remain largely available from surrounding public locations during construction.</p> <p>Construction activities would result in temporary visual changes associated with building demolition, excavation, construction equipment, staging areas, and temporary surface disturbances. These changes would be most noticeable near locations where existing commercial parcels are acquired and demolished to accommodate new stations, station plazas, surface parking, electrical equipment, or MSF facilities. Although demolition would temporarily alter the visual character of these parcels, such changes would be short term and transitional in nature. Construction staging areas would be fenced, screened where feasible, and managed to minimize visual nuisance and avoid substantial degradation of visual character and quality in adjacent areas. Dust control measures required under South Coast Air Quality Management District Rule 403 would reduce visible dirt and dust on public roadways and nearby properties. Overall, while construction would introduce temporary visual contrast within the corridor, these effects would not result in a substantial or long-term degradation of the visual environment. Thus, there would be no adverse effect.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>	<p>No avoidance, minimization, or mitigation measures are needed to address construction or operational effects on this resource.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
<p>Hazardous Materials (Transport, Storage, Use, and Disposal of Hazardous Materials)</p>	<p>Long-Term: The Build Alternative would involve the use of small amounts of hazardous substances, such as typical cleaning products used in maintenance. If the quantity of hazardous materials used, handled, or stored on-site would exceed regulatory thresholds, operations would adhere to all applicable existing federal, state, and local regulations pertaining to hazardous materials. Compliance with NPM HAZ-1 would ensure that cleaning and maintenance products are labeled with appropriate cautions and instructions for handling, storage, and disposal these materials would be in accordance with label directions. Compliance with NPM HAZ-3 would ensure that operation of the MSF would comply with existing regulations if the quantity of hazardous materials used, handled, or stored onsite exceeds the regulatory thresholds. As identified in NPM HAZ-1 and NPM HAZ-3, operational best management practices for hazardous materials would be implemented and the Build Alternative would have no adverse effect.</p> <p>Short-Term/Construction: The Build Alternative could expose the public or the environment to hazardous materials from the use of typical construction equipment and vehicles containing fuel, oil, and grease; hazardous building materials such as asbestos and lead based paint that could be encountered during demolition; and the use and transport of limited quantities of certain hazardous materials such as paints, solvents, and glues used during construction. NPM HAZ-2, NPM HAZ-4, and NPM HAZ-5 would implement construction best management practices for Hazardous materials.</p> <p>NMM HAZ-2 - Soil and Groundwater Management Plan would address potential handling and disposal of contaminated soil and groundwater, NMM HAZ-3 – Metro’s Contractor Specifications would provide guidance if soil and groundwater contamination is encountered, NMM HAZ-4 - Safety Manuals and Construction Work Plans would address worker health and safety and NMM HAZ-5 - Hazardous Building Survey and Abatement would require investigation into building materials or equipment that contains hazardous materials. Compliance with NMM HAZ-2 through NMM HAZ-5 to reduce adverse effects related to the use and/or storage of hazardous materials, transport of hazardous materials, and disposal of hazardous waste to not adverse.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: NPM HAZ-1 - Operational Best Management Practices for Hazardous Materials NPM HAZ-3 - Operational Best Management Practices for Maintenance and Storage Facility for Hazardous Materials</p> <p>Short-Term/Construction: NPM HAZ-2 - Construction Best Management Practices for Hazardous Materials NPM HAZ-4 - Construction Best Management Practices for Maintenance and Storage Facility for Hazardous Materials NPM HAZ-5 - Construction Best Management Practices for Commerce/Citadel station for Hazardous Materials NMM HAZ-2 - Soil and Groundwater Management Plan NMM HAZ-3 – Metro’s Contractor Specifications NMM HAZ-4 - Safety Manuals and Construction Work Plans NMM HAZ-5 - Hazardous Building Survey and Abatement</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Hazardous Materials (Release of Hazardous Materials)	<p>Long-Term: While it is anticipated that operation of the Build Alternative would not create a significant hazard to the public or the environment involving the release of hazardous materials into the environment, this operational analysis presents the potential possibilities of such a risk. No activities are proposed that would result in the use or discharge of unregulated hazardous materials. Hazardous materials could be stored within the Build Alternative site, but the materials would generally be in the form of routinely used common chemicals. Therefore, the probability of a major hazardous materials incident would be remote. Minor incidents would be more likely, but the consequences of the release of hazardous materials would likely not be severe due to the types of common chemicals anticipated to be used at the Build Alternative site. As identified in NPM HAZ-1 and NPM HAZ-3, operational best management practices for hazardous materials would be implemented and the Build Alternative would result in no adverse effect.</p> <p>Short-Term/Construction: While it is anticipated that construction of the Build Alternative would not create a significant hazard to the public or the environment involving the release of hazardous materials into the environment, this construction analysis presents the potential possibilities of such a risk. Construction of the Build Alternative would require grading and tunneling activities that would potentially expose construction workers and the public to hazardous conditions through disturbance of contaminated soil and/or groundwater. NMM HAZ-1 would require further investigation into potential soil and ground contamination. NMM HAZ-2 - Soil and Groundwater Management Plan would address potential handling and disposal of contaminated soil and groundwater, NMM HAZ-3 – Metro’s Contractor Specifications would provide guidance if soil and groundwater contamination is encountered, NMM HAZ-4 - Safety Manuals and Construction Work Plans would address worker health and safety and NMM HAZ-5 - Hazardous Building Survey and Abatement would require investigation into building materials or equipment that contains hazardous materials. The Build Alternative would adhere to existing federal and state regulations related to hazardous materials and implement NMM HAZ-1 through NMM HAZ-5 and would have no adverse effect.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: NPM HAZ-1 - Operational Best Management Practices for Hazardous Materials NPM HAZ-3 - Operational Best Management Practices for Maintenance and Storage Facility for Hazardous Materials</p> <p>Short-Term/Construction: NMM HAZ-1 - Phase I Environmental Site Assessment [ESA] and Phase II ESA NMM HAZ-2 - Soil and Groundwater Management Plan NMM HAZ-3 - Metro’s Contractor Specifications NMM HAZ-4 - Safety Manuals and Construction Work Plans NMM HAZ-5 - Hazardous Building Survey and Abatement</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Hazardous Materials (Hazardous Materials Sites)	<p>Long-Term: Any health risks to the public and/or the environment associated with release of hazardous materials would be mitigated during construction and would not occur after construction is complete. No ground-disturbing activities would occur during operations that could result in hazardous releases of contaminated soil from listed hazardous materials sites, thereby creating a significant hazard to the public or the environment.</p> <p>Short-Term/Construction: Disturbance of existing soil contamination from hazardous materials release sites or other sources could pose a health risk to construction workers, the public, and/or the environment if not characterized, handled, and disposed of properly, and therefore would result in an adverse effect. NPM HAZ-4 and NPM HAZ-5 would implement construction best management practices for the Build Alternative. NMM HAZ-1 would require further investigation into potential soil and ground contamination. NMM HAZ-2 - Soil and Groundwater Management Plan would address potential handling and disposal of contaminated soil and groundwater, NMM HAZ-3 – Metro’s Contractor Specifications would provide guidance if soil and groundwater contamination is encountered, NMM HAZ-4 - Safety Manuals and Construction Work Plans would address worker health and safety and NMM HAZ-5 - Hazardous Building Survey and Abatement would require investigation into building materials or equipment that contains hazardous materials. Construction would adhere to existing federal and state regulations related to hazardous materials as set forth in NPM HAZ-4 and NPM HAZ-5 and would implement NMM HAZ-1 through NMM HAZ-5 to reduce adverse effects related to listed hazardous materials sites to not adverse.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: None</p> <p>Short-Term/Construction: NPM HAZ-4 - Construction Best Management Practices for Maintenance and Storage Facility for Hazardous Materials NPM HAZ-5 - Construction Best Management Practices for Commerce/Citadel station for Hazardous Materials NMM HAZ-1 - Phase I Environmental Site Assessment [ESA] and Phase II ESA NMM HAZ-2 - Soil and Groundwater Management Plan NMM HAZ-3 - Metro’s Contractor Specifications NMM HAZ-4 - Safety Manuals and Construction Work Plans NMM HAZ-5 - Hazardous Building Survey and Abatement</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Water Resources (Water Quality and Erosion)	<p>Long-Term: The Build Alternative could release pollutants such as heavy metals and petroleum hydrocarbons over time. However, as described above, post-construction runoff and pollution control measures would be implemented, as required by National Pollutant Discharge Elimination System permits and identified in NPM HWQ-1. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: Construction could increase erosion and sedimentation and release pollutants that could affect water quality. Construction would comply with the National Pollutant Discharge Elimination System Construction General Permit and associated Stormwater Pollution Prevention Plan, as identified in NPM HWQ-2. The Study Area is relatively flat, which would minimize the risk of erosion and sedimentation. Areas of exposed soil that were previously paved would be repaved post construction.</p> <p>If encountered, groundwater contaminated with hazardous materials could spread into nearby surface water and groundwater, resulting in an adverse effect. Construction would adhere to applicable Waste Discharge Requirements and implement NMM HAZ-2, a Soil and Groundwater Management Plan to address handling and disposal of potential contaminated groundwater, and NMM HAZ-3, Metro’s Contractor Specifications for encountering exposed soil and groundwater. Implementation of mitigation would reduce adverse effects to not adverse.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: NPM HWQ-1 - Operational Best Management Practices for Water Resources</p> <p>Short-Term/Construction: NPM HWQ-2 - Construction Best Management Practices for Water Resources NMM HAZ-2 - Soil and Groundwater Management Plan NMM HAZ-3 – Metro’s Contractor Specifications</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>
Water Resources (Groundwater Resources)	<p>Long-Term: The Build Alternative would not substantially change the amount of impervious surfaces and would not affect the Rio Hondo Spreading Grounds where most of the groundwater recharge occurs. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: There would be no construction within the Rio Hondo Spreading Grounds where most of the groundwater recharge in the vicinity occurs. The groundwater depth near the underground guideway would likely be below or at the lower level of construction activities for the Build Alternative (Diaz-Yourman and Associates 2021); thus, the amount of water that would need to be extracted, cleaned, and disposed of during construction would be minimal. Thus, there would be no adverse effect.</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>	<p>No avoidance, minimization, or mitigation measures are needed to address construction or operational effects on this resource.</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Water Resources (Drainage)	<p>Long-Term: The Build Alternative would not result in ground disturbance and there would be no change in erosion or sedimentation. Since the Build Alternative would be constructed on and under primarily impervious land, it would not substantially increase the volume or peaks of runoff entering the storm drain system. The Build Alternative would comply with post-construction measures in applicable National Pollutant Discharge Elimination System permits, as identified in NPM HWQ-1. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: Construction would comply with the Construction General Permit and associated Stormwater Pollution Prevention Plan best management practices, as identified in NPM HWQ-2. Drainage systems would be constructed and connected to municipal systems per Metro Rail Design Criteria and jurisdictional permits. Metro/Metro's contractor would be responsible for preparing the drainage and grading plans and obtaining approval of the plans before construction. Thus, there would be no adverse effect.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>	<p>Long-Term: NPM HWQ-1 - Operational Best Management Practices for Water Resources</p> <p>Short-Term/Construction: NPM HWQ-2 - Construction Best Management Practices for Water Resources</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Land Use and Development (Land Use Compatibility)	<p>Long-Term: The new light rail transit components of the Build Alternative, including the MSF and its lead tracks, would all be designed to integrate into and be compatible with the existing character of the surrounding land uses. Operation of the Build Alternative would not interfere with pedestrian and vehicle crossings or affect vehicle, bicycle, or pedestrian access in the surrounding community and would follow best management practices to maintain circulation, as identified in NPM TRA-1 and NPM TRA-3. As set forth in NPM EFI-1, development of Metro-owned property would follow Metro’s Joint Development and Transit Oriented Communities Policy, supporting redevelopment with transit oriented uses and reducing potential land use impacts. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: Lane and/or road closures during construction would result in temporary periodic movement limitations for pedestrians, cyclists, and vehicles within and between local communities. Disruptions to communities would be minimized using jurisdiction coordinated scheduling, advanced notification, and wayfinding signage, as set forth in NPM TRA-2. As identified in NPM TRA-4, access would be maintained to all properties surrounding the MSF. However, there would be an adverse effect from road and lane closures during construction. As required by NMM TRA-2, a Traffic Management Plan, would minimize disruptions during construction and reduce adverse effects to not adverse.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: NPM TRA-1 - Operational Best Management Practices for Transportation NPM TRA-3 - Operational Best Management Practices for the Maintenance and Storage Facility Regarding Transportation NPM EFI-1 - Metro Joint Development Program and Metro Pilot Local Hiring Initiative</p> <p>Long-Term/Construction: NPM TRA-2 - Construction Best Management Practices for Transportation NPM TRA-4 - Construction Best Management Practices for the Maintenance and Storage Facility Regarding Transportation NMM TRA-2 - Traffic Management Plan</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>
Land Use and Development (Consistency with Land Use Plans)	<p>Long-Term and Short-Term/Construction: The Build Alternative would be consistent with applicable land use plans because it would improve regional and local transit connectivity in a manner that supports adopted regional, county, and city goals for transit oriented development, improved mobility, and coordinated land use and transportation planning. Thus, there would be no adverse effect.</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>	<p>No avoidance, minimization, or mitigation measures are needed to address construction or operational effects on this resource.</p>	<p>Long-Term and Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
<p>Acquisitions and Relocations (Acquisition, Displacement, Replacement, and Relocation)</p>	<p>Long-Term: The Build Alternative could result in potential property acquisitions for the Build Alternative systems and facilities. Properties subject to potential acquisition include relocation assistance and compensation in accordance with applicable federal and state relocation laws. Adherence to existing regulations would ensure that affected property are treated fairly and supported through the process. In addition, phased acquisition, advance notice, and coordination with local agencies would allow businesses sufficient time to relocate without significant disruption. As set forth in NPM TRA-3, operational best management practices would be implemented to maintain access to property and businesses during operation of the maintenance and storage facility. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: Construction activities could require some property acquisitions in the form of temporary construction easements to allow construction staging on public sidewalks, streets, and if necessary, private property. Temporary construction easements would include temporary staging areas (including tunnel boring machine launch site), materials and equipment storage, contractor site offices during the construction period, and areas for cut and cover activities. The properties used for temporary construction easements would be returned to their original owners; however, these temporary construction easements could last the duration of construction (60 to 84 months) and could result in an adverse effect on property and businesses.</p> <p>Short-term street and sidewalk closures during construction of the Build Alternative could result in temporary limitations on movement for vehicles, cyclists, and pedestrians, which could affect access to properties and businesses in general. As set forth in NPM TRA-2, best management practices would be implemented during construction to address pedestrian and vehicle access and minimize disruption from construction work zones. However, lane and road closures could result in adverse effects on businesses. For the MSF, as identified in NPM TRA-4, access would be maintained to all surrounding properties throughout the course of construction. NMM TRA-2 would require development of a Traffic Management Plan that specifies measures to minimize disruption during construction, such as establishing detour routes and coordinating with local business owner, and would reduce adverse effects to not adverse. Additionally, Metro has existing pilot programs that provide financial assistance to small businesses along rail corridors under construction.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: NPM TRA-3 - Operational Best Management Practices for the Maintenance and Storage Facility Regarding Transportation</p> <p>Short-Term/Construction: NPM TRA-2 - Construction Best Management Practices for Transportation NPM TRA-4 - Construction Best Management Practices for the Maintenance and Storage Facility Regarding Transportation NMM TRA-2 - Traffic Management Plan</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>
<p>Noise and Vibration (Noise)</p>	<p>Long-Term: Noise along the Build Alternative would be primarily due to passbys¹ from light rail transit vehicles for receptors near its aerial and at-grade configurations, in addition to operational noise for receptors near stationary noise sources (such as stations, the parking facility, or special trackwork such as switches). Noise generated by passby of light rail transit vehicles would not exceed the FTA severe noise impact criteria at any sensitive receptors because of the distance of receptors from the alignment and/or intervening</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: NPM NOI-1 - Operational Design Standards for Noise</p>	<p>Long-Term: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
	<p>structures, high existing ambient noise levels near receptors, and because a portion of the alignment would be underground.</p> <p>Noise from at-grade crossings (warning bells) and special trackwork (e.g., turnouts and crossovers) would be adjacent to manufacturing and commercial properties with high existing ambient noise levels. Thus, this noise would not exceed the FTA severe noise impact criteria at any sensitive receptors and there would be no adverse effect.</p> <p>Operational noise levels for the traction power substation would be substantially lower than existing ambient noise levels and design standards would be implemented to reduce their noise levels, as set forth in NPM NOI-1.</p> <p>One noise-sensitive historic property, the Kelly House at 860 Washington Boulevard, is approximately 80 feet from the crossover east of Greenwood station and is currently used as a residence. One historic property, the Greenwood Elementary School, which is currently used as a school, is adjacent to the Build Alternative but outside of the FTA screening distance. In total, four non-residential receptors, a park, library, and two schools, could potentially be impacted by airborne noise. None of the Build Alternative noise levels at these receptors are predicted to exceed the FTA moderate or severe impact criteria along the Build Alternative alignment.</p> <p>Short-Term/Construction: The Build Alternative would have adverse noise effects from the use of construction equipment near properties and sensitive receptors. As set forth in NPM NOI-2, construction activities would be carried out in compliance with Metro's Construction Noise and Vibration Control baseline specifications. Implementation of NMM NOI-1 through NMM NOI-10 would reduce the reasonably foreseeable adverse effects during construction to not adverse. NMM NOI-1 would require implementation of a noise control plan and construction monitoring plan. NMM NOI-2 would require Metro's contractor to use cast-in-drilled holes or drilled piles rather than impact pile drivers where necessary. NMM NOI-3 would require the construction contractor to erect temporary noise barriers between noisy activities and noise sensitive receptors. NMM NOI-4 would require Metro's contractor to locate construction equipment and material staging areas away from sensitive receptors where practicable. NMM NOI-5 would require construction traffic and haul route routing in areas without noise-sensitive receptors where practicable. NMM NOI-6 would require contractors to use best available control technologies to limit excessive noise when working near residences where practicable. NMM NOI-7 would require Metro to establish a Construction Hotline to resolve noise issues arising from construction activities. NMM NOI-8 and NMM NOI-9 would lessen noise associated with spoil removal where necessary, and NMM NOI-10 would require ventilation fans to be placed away from sensitive receptors.</p>		<p>Short-Term/Construction: NPM NOI-2 - Construction Noise and Vibration Control NMM NOI-1 - Construction Noise Plan and Noise Monitoring Plan NMM NOI-2 - Cast-in-Drilled-Hole Construction Methodology NMM NOI-3 - Noise Barriers NMM NOI-4 - Construction Staging Area NMM NOI-5 - Haul Routes NMM NOI-6 - Best Available Control Technologies NMM NOI-7 - Construction Working Hours NMM NOI-8 - Public Notification of Construction Operations and Schedules NMM NOI-9 - Truck Staging NMM NOI-10 - Tunnel Vent Fans Away From Residences</p>	<p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Noise and Vibration (Vibration)	<p>Long-Term: Corridor-wide vibration levels are predicted to exceed the FTA frequent criterion for vibration, resulting in an adverse effect. With implementation of NMM NOI-11 and NMM NOI-12, adverse operational vibration effects would be reduced to not adverse. NMM NOI-11 would require the use of track support systems to reduce vibratory impacts caused by steel wheels rolling over steel rails at rail joints during the passby of LRT vehicles at residences and NMM NOI-12 would reduce vibratory levels by reducing the width of gaps at joints when steel wheels roll over steel rails at rail joints.</p> <p>Short-Term/Construction: The Build Alternative would have adverse vibration effects from the use of construction equipment. As set forth in NPM NOI-2, construction activities would be carried out in compliance with Metro's Construction Noise and Vibration Control baseline specifications. Implementation of NMM NOI-2, NMM NOI-4, NMM NOI-5, NMM NOI-7, NMM NOI-8, NMM NOI-13, and NMM NOI-14 would reduce the potential vibration-related adverse effects during construction to not adverse. NMM NOI-2 would require Metro/Metro's contractor to use cast-in-drilled hole or drilled piles rather than impact pile drivers to reduce excessive vibration where necessary to meet performance criteria. NMM NOI-4 would require Metro/Metro's contractor to locate construction equipment and material staging areas away from sensitive receptors. NMM NOI-5 would require Metro/Metro's contractor to route construction traffic and haul routes away from sensitive receptors where practicable. NMM NOI-7 would require Metro/Metro's contractor to establish a Construction Hotline to resolve vibration issues. NMM NOI-8 would require using a spoil removal conveyor for the TBM where necessary to reduce vibration. NMM NOI-13 would require Metro/Metro's contractor to identify properties that may be susceptible to vibration damage within 100 feet of the alignment to provide data for monitoring vibration effects and developing the construction vibration control plan and monitoring plan described in NMM NOI-14. NMM NOI-14 would require Metro/Metro's contractor to develop a construction vibration control plan and a construction vibration monitoring plan to minimize vibration effects and reduce the risk of damage to susceptible structures.</p>	<p>Long-Term: Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: NMM NOI-11 - Operational Vibration Mitigation — Tunnel NMM NOI-12 - Operational Vibration Mitigation</p> <p>Short-Term/Construction: NPM NOI-2 - Construction Noise and Vibration Control NMM NOI-2 - Cast-in-Drilled-Hole Construction Methodology NMM NOI-4 - Construction Staging Area NMM NOI-5 – Haul Routes NMM NOI-7 – Construction Working Hours NMM NOI-8 - Public Notification of Construction Operations and Schedules NMM NOI-13 – Identify Vibration Susceptible Properties NMM NOI-14 - Vibration Pre-Construction Survey and Control Plan</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Safety and Security (Safety)	<p>Long-Term: The introduction of light rail vehicles adjacent to traffic lanes for the at-grade alignment along Washington Boulevard could create a safety concern for pedestrians and bicyclists at intersection crossings. The proposed stations would likely raise demand of pedestrians crossing nearby street intersections and, therefore, would need intersections near stations to provide adequate capacity and safety for pedestrians. As identified in NPM TRA-1, best practice safety measures would be implemented to minimize potential conflicts between vehicles and pedestrians. As standard practice, and set forth in NPM SAF-1, Metro would implement educational outreach efforts in coordination with local schools, libraries, and community centers located near the Build Alternative. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: Disruption during construction, including the use of large construction equipment and haul trucks, would create potential safety hazards for pedestrians, bicyclists, bus riders, and motorists. Implementation of safety measures such as signage, partial lane closures, construction barriers, and supervision by safety and security personnel. Compliance with safety requirements, including Occupational Safety and Health Administration, California Occupational Safety and Health Administration, and Metro safety and security programs, as identified in NPM TRA-2, would be implemented. Additionally, implementation of NMM TRA-2, requiring a Traffic Management Plan, would reduce adverse effects from road and lane closures to not adverse.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: NPM TRA-1 - Operational Best Management Practices for Transportation NPM SAF-1 - Fire and Police Best Management Practices</p> <p>Short-Term/Construction: NPM TRA-2 - Construction Best Management Practices for Transportation NMM TRA-2 - Traffic Management Plan</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>
Safety and Security (Security)	<p>Long-Term: Security issues, such as fare evasion, assault, or robbery could potentially occur at light rail transit stations, within light rail transit vehicles, and at associated parking facilities. As standard operating practice, and as set forth in NPM SAF-1, Metro would supplement existing police protection services by providing Transit Services Bureau officers and contracted police services at all new light rail transit facilities, as needed to ensure that adequate police protection services are provided. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: The presence of construction equipment and use of construction staging could result in security incidents, such as theft and vandalism. For security purposes, construction staging areas would be equipped with a combination of fences, lighting, security cameras, and/or guards. Additionally, construction would comply with Metro guidelines pertaining to security and the implementation of standard site security practices identified in NPM TRA-2. Thus, there would be no adverse effect on security related to construction activities.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>	<p>Long-Term: NPM SAF-1 - Fire and Police Best Management Practices</p> <p>Short-Term/Construction: NPM TRA-2 - Construction Best Management Practices for Transportation</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
<p>Safety and Security (Emergency Response)</p>	<p>Long-Term: The Build Alternative would potentially increase fire and police protection response times as a result of delays at new grade crossings. As standard practice and as identified in NPM SAF-1, the contractor would coordinate with fire and police protection officials when designing grade crossings. In addition, as identified in NPM TRA-1 and NPM TRA-3, all new light rail transit facilities and crossings would be designed in accordance with the Metro Rail Design Criteria, including the Fire/Life Safety Criteria, to ensure safety and minimize potential hazards at all locations. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: The potential for incidents of crime and terrorism could occur at construction sites and staging areas and could pose threats to human life and safety. Construction sites would be secured to prevent intrusion and illegal activities during construction as identified in NPM TRA-2.</p> <p>Emergency access could temporarily be obstructed by construction activities that could include temporary lane closures and obstruction of driveways. For the MSF, alternative routes would be available for any streets requiring closure, as set forth in NPM TRA-4. However, there would be an adverse effect due to lane closures. Implementation of NMM TRA-2 would require development of a Traffic Management Plan to facilitate access to local facilities impacted by road or lane closures, which would reduce adverse effects to not adverse.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: NPM SAF-1 - Fire and Police Best Management Practices NPM TRA-1 - Operational Best Management Practices for Transportation NPM TRA-3 - Operational Best Management Practices for the Maintenance and Storage Facility Regarding Transportation</p> <p>Short-Term/Construction: NPM TRA-2 - Construction Best Management Practices for Transportation NPM TRA-4 - Construction Best Management Practices for the Maintenance and Storage Facility Regarding Transportation NMM TRA-2 - Traffic Management Plan</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>
<p>Transportation Impacts (Transit)</p>	<p>Long-Term: The Build Alternative would provide transit travel time savings compared to the No Build Alternative. The Build Alternative's light rail transit service would result in less travel time compared to bus service between the Atlantic/Pomona station and Greenwood station. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: Temporary roadway closures, lane closures, bus stops, and sidewalk closures could disrupt the circulation system. These closures would result in a temporary adverse effect on transit operation. Implementation of NMM TRA-2, a Traffic Management Plan, would reduce this potential adverse effect on transit to not adverse.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: None</p> <p>Short-Term/Construction: NMM TRA-2 - Traffic Management Plan</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
<p>Transportation Impacts (Travel Patterns)</p>	<p>Long-Term: The Build Alternative would result in reduced VMT and vehicle hours traveled compared to the No Build Alternative. The operation of the MSF would not result in a substantial or measurable increase in VMT and vehicle hours traveled. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: Construction could temporarily generate additional VMT related to construction work activities. Construction work activities are temporary and localized to the work area. As identified in NPM TRA-2, the Project would coordinate construction related traffic and travel patterns with the Cities of Commerce and Montebello and Los Angeles County throughout the construction process. Implementation of NPM TRA-2, Construction Best Management Practices for Transportation, would not result in a substantial change in travel patterns or increase VMT during the construction of the Build Alternative. Thus, there would be no adverse effect.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>	<p>Long-Term: None</p> <p>Short-Term/Construction: NPM TRA-2 - Construction Best Management Practices for Transportation</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>
<p>Transportation Impacts (Local Roadway Circulation)</p>	<p>Long-Term: The Build Alternative could result in roadway modifications to accommodate the light rail transit guideway, providing long-term mobility benefits. The MSF would involve only minor changes to traffic circulation, including new or modified driveways. The Build Alternative would follow best management practices for transportation, as set forth in NPM TRA-1. However, the Build Alternative could result in a single intersection (Intersection #32: Garfield Avenue and Washington Boulevard) to move from Level of Service D to Level of Service E in the pm peak due to a reduction of travel lanes on Washington Boulevard, resulting in an adverse effect. Implementation of NMM TRA-1 would require one left-turn lane to be added in the southbound approach of Intersection #32 to optimize this intersection's cycle length and splits. This would reduce the adverse effect to not adverse.</p> <p>Short-Term/Construction: The Build Alternative could require temporary closures and detours that would cause a reduction in capacity along affected roads. Construction activities would be temporary and localized to the work area and would follow best management practices for transportation, as set forth in NPM TRA-2 and NPM TRA-4. However, there would be an adverse effect on circulation from road and lane closures. Implementation of NMM TRA-2, a Traffic Management Plan, would reduce this adverse effect on pedestrians and bicyclists to not adverse.</p>	<p>Long-Term: Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: NPM TRA-1 - Operational Best Management Practices for Transportation NMM TRA-1 - Garfield Avenue and Washington Boulevard Intersection</p> <p>Short-Term/Construction: NPM TRA-2 - Construction Best Management Practices for Transportation NPM TRA-4 - Construction Best Management Practices for the Maintenance and Storage Facility Regarding Transportation NMM TRA-2 - Traffic Management Plan</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
<p>Transportation Impacts (Parking)</p>	<p>Long-Term: The Build Alternative could remove and relocate the parking supply. Off- and on-street parking facilities may be utilized for construction activities. For off-street parking spaces that are associated with full takes of parcels and their businesses, the demand for these spaces would be eliminated as well. As such, there would be no adverse effects on off-street parking with the full removal of these parcels. The MSF would provide sufficient on-site parking for employees, and no operational spillover parking effects on off-street or on-street parking facilities would occur. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: Although temporary, the potential effects on parking could result in a temporary adverse effect from construction of the Build Alternative. Work activities would be temporary and localized to the work area and implementation of NMM TRA-2, a Traffic Management Plan, would reduce this potential adverse effect on parking to not adverse.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: None</p> <p>Short-Term/Construction: NMM TRA-2 Traffic Management Plan</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>
<p>Transportation Impacts (Pedestrian and Bicyclists)</p>	<p>Long-Term: The Build Alternative would provide bicycle circulation and access amenities in the station areas. In addition, the Build Alternative would enhance walkability in the immediate vicinity of the proposed stations and include improvements coordinated with local jurisdictions. Additional enhancements to existing signalized crosswalks, such as continental crosswalks, would further improve pedestrian access to transit stations as identified in NPM TRA-1. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: Temporary sidewalk closures could be required and short-term lane or roadway closures could affect existing and proposed bike routes. NPM TRA-2 would be implemented during construction of the Build Alternative to address pedestrian and vehicle access and minimize disruption from construction work zones. As set forth in NPM TRA-4, site access to the MSF and surrounding properties will be retained and meet design requirements during construction. However, there would be an adverse effect from road and lane closures. Implementation of NMM TRA-2, a Traffic Management Plan, would reduce this adverse effect on pedestrians and bicyclists to not adverse.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: NPM TRA-1 - Operational Best Management Practices for Transportation</p> <p>Short-Term/Construction: NPM TRA-2 - Construction Best Management Practices for Transportation NPM TRA-4 - Construction Best Management Practices for the Maintenance and Storage Facility Regarding Transportation NMM TRA-2 - Traffic Management Plan</p>	<p>Long-Term: No adverse effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
<p>Transportation Impacts (Emergency Access)</p>	<p>Long-Term: The Build Alternative could potentially increase fire and police response times due to brief delays at new grade crossings; however, these would be minimal because of the short train lengths and limited crossing times. Emergency vehicles would continue to have access through coordinated signal operations and design measures ensuring quick clearance of intersections. Standard coordination with police and fire departments, compliance with applicable design and safety standards (including Fire/Life Safety Criteria), and construction of a new access road on 3rd Street to the Los Angeles County Sheriff’s Department would maintain or improve emergency access. The Build Alternative would follow best management practices for transportation, as set forth in NPM TRA-1. The MSF would include minor changes to traffic circulation, such as new or modified driveways, but these changes would be designed according to applicable state, Metro, and local design criteria and standards as identified in NPM TRA-3. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: Temporary construction-related street closures or detours could potentially increase fire and police protection response times. The Build Alternative would follow best management practices for transportation, as set forth in NPM TRA-2. However, there would be an adverse effect on circulation from road and lane closures. Implementation of NMM TRA-2, a Traffic Management Plan, would reduce this potential adverse effect on emergency access to not adverse.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: Adverse Effect</p>	<p>Long-Term: NPM TRA-1 - Operational Best Management Practices for Transportation NPM TRA-3 - Operational Best Management Practices for the Maintenance and Storage Facility Regarding Transportation</p> <p>Short-Term/Construction: NPM TRA-2 - Construction Best Management Practices for Transportation NMM TRA-2 - Traffic Management Plan</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>
<p>Utilities (Water Supplies and Facilities)</p>	<p>Long-Term: The proposed light rail transit guideway and stations would consume water for landscaping irrigation and to supply fire sprinkler systems when/if needed. The MSF would consume water for landscaping irrigation, vehicle washing/rinsing, fire sprinkler systems, and typical employee breakroom/kitchen uses. The Build Alternative is anticipated to result in a small percentage increase in municipal water demand; however, the amount consumed would be less than the projected future capacity of available water supplies. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: Use of minimal water, mostly for dust control, would be temporary and intermittent and would not necessitate the relocation or expansion of potable water infrastructure. Construction of the MSF would include relocation and installation of new domestic water and fire water pipelines. Relocation of any water appurtenances (e.g., fire hydrants and water meters) would be near existing facilities, which would minimize impacts from ground disturbance. The relocated water appurtenances would connect to existing pipelines and would not create new demand for water that would exceed the capacity of the water supply system. Thus, there would be no adverse effect.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>	<p>No avoidance, minimization, or mitigation measures are needed to address construction or operational effects on this resource.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Utilities (Wastewater Treatment Facilities and Capacity)	<p>Long-Term: The proposed light rail transit stations would not have public restrooms and, as a result, would not generate wastewater. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: Activities would generate wastewater through the use of temporary worker restrooms and would require new sewer line connections for the MSF. No construction activities would exceed sewer capacity, generate significant wastewater, or necessitate the relocation or expansion of wastewater facilities. Thus, there would be no adverse effect.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>	<p>No avoidance, minimization, or mitigation measures are needed to address construction or operational effects on this resource.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>
Utilities (Stormwater Facilities)	<p>Long-Term: The Build Alternative is in an urbanized area that is largely impervious and has existing storm drain infrastructure. The Build Alternative would result in a negligible increase in impervious surfaces, but not to an extent that would lead to increased runoff. The Build Alternative would also include low impact design features to facilitate drainage flow in compliance with stormwater control requirements, such as those established in the California Green Building Standards Code and set forth in NPM HWQ-1. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: Runoff could be generated by construction activities, such as dewatering and vegetation removal. Compliance with National Pollution Discharge Elimination System Construction General Permit and implementation of best management practices, as identified in NPM HWQ-2, would control runoff from construction. Thus, construction would not create or contribute runoff water that would exceed the capacity of the stormwater drainage system, and there would be no adverse effect.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>	<p>Long-Term: NPM HWQ-1 - Operational Best Management Practices for Water Resources</p> <p>Short-Term/Construction: NPM HWQ-2 - Construction Best Management Practices for Water Resources</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>
Utilities (Electric Power)	<p>Long-Term: The amount of electricity consumed for the Build Alternative during operation would be less than the projected future capacity of electricity supplies available. Further, the aerial guideway would require relocation of utility support poles, which would not result in an expansion of electricity usage. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: The Build Alternative would include installation of a power line for the tunnel boring machine and relocation and installation of electric lines to accommodate the site layout for the MSF. Demand impacts related to this new power service feed would be temporary and would not result in a substantial change in usage that could affect the capacity of service providers (i.e., Southern California Edison). Thus, the Build Alternative would not result in adverse effects related to relocation or construction of electric power.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>	<p>No avoidance, minimization, or mitigation measures are needed to address construction or operational effects on this resource.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Utilities (Natural Gas)	<p>Long-Term: The proposed light rail transit guideway and stations would not consume natural gas. The MSF would consume gas for routine maintenance activities and heating. The use of natural gas at the MSF would be substantially less than the projected future capacity of natural gas supplies. Therefore, operation of the Build Alternative would not require any notable expansion of an existing facility or construction of a new facility, and there would be no adverse effect.</p> <p>Short-Term/Construction: Construction activities would consume minimal, temporary, and intermittent natural gas for construction equipment. Construction activities for the light rail transit guideway and stations would mostly take place within existing public right-of-way and no natural gas facilities have been identified in the construction zone that would require relocation. Construction of the MSF would include the relocation and installation of gas pipelines, which would connect to existing pipelines and would not create new demand for natural gas that would exceed the capacity of the SoCal Gas supply system. Thus, there would be no adverse effect.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>	<p>No avoidance, minimization, or mitigation measures are needed to address construction or operational effects on this resource.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>
Utilities (Telecommunication)	<p>Long-Term: Minor telecommunication connections for equipment like emergency phones may be installed and used at stations and in certain locations along the guideway. However, operations would not require any notable expansion of an existing facility or construction of a new facility. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: Construction may require the relocation of telecommunication facilities. If relocated, the telecommunication facilities would be relocated in close proximity to their previous location. Construction would not require or result in any notable expansion of possible relocated telecommunication facilities or construction of new facilities. Thus, there would be no adverse effect.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>	<p>No avoidance, minimization, or mitigation measures are needed to address construction or operational effects on this resource.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Utilities (Solid Waste)	<p>Long-Term: The light rail transit guideway and stations would not include an operational source of solid waste although solid waste would be generated by transit users and by employees at the MSF. The disposal of solid waste from waste and recycle bins would have no notable potential to affect landfill capacity. Thus, there would be no adverse effect.</p> <p>Short-Term/Construction: Construction would involve the generation and removal of solid waste associated with the various demolition and construction activities. This would result in an incremental and temporary increase in solid waste disposal at landfills and other waste disposal facilities. Some excavated soil may be reused on-site, and the remaining materials would be hauled off-site for disposal at any of the area landfills that accept and/or recycle construction/demolition materials in compliance with Assembly Bill 939. Waste would be brought to transfer stations in batches throughout the construction period and there are multiple transfer stations in Los Angeles County where this waste could be collected and transferred to the landfill. The County anticipates adequate solid waste disposal capacity to be available over the next 15-year planning period (2019 to 2034) (LACDPW 2021). Thus, there would be adequate capacity available in Los Angeles County to handle anticipated solid waste generation during the construction period, and there would be no adverse effect.</p>	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>	No avoidance, minimization, or mitigation measures are proposed.	<p>Long-Term: No Adverse Effect</p> <p>Short-Term/Construction: No Adverse Effect</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
<p>Section 4(f) Use through permanent incorporation and/or temporary occupancy</p>	<p>Section 4(f) protects publicly owned land of a public park, recreation area, or wildlife and waterfowl refuge of national, state, or local significance, as well as land of a publicly or privately owned historic site of national, state, or local significance. There are 10 historic Section 4(f) resources in the Area of Potential Effects and 6 park recreation Section 4(f) resources in the study area. Property acquisition, demolition and/or construction activities could represent a use through permanent incorporation and/or temporary occupancy to three of these resources: the National Chicano Moratorium March Historic District, the Vail Field Industrial Addition historic district, and the Pacific Metals Company building (if MSF Site 2 is selected).</p> <p><u>National Chicano Moratorium March:</u> Construction would remove and replace the asphalt pavement along portions of the historic district’s contributing march route. A trench would be installed within the existing right-of-way at 3rd Street and La Verne Avenue. Temporary occupancy from construction would represent a use. The Build Alternative would not reconfigure the streets and sidewalks, which would continue to be constructed with matching materials (asphalt and concrete). None of the district’s character-defining features or contributing elements would be demolished or altered. The historic district would still convey its historical significance and there would be no adverse effect on the march route. Therefore, the Build Alternative would result in a <i>de minimis</i> impact.</p> <p><u>Vail Field Industrial Addition Historic District:</u> Construction would permanently acquire and demolish six contributors to the historic district. Permanent incorporation from acquisition and demolition and temporary occupancy from construction activities would represent a use. However, none of these contributors are individually eligible historic properties. The core would remain intact with enough contributors to convey its historical significance. Therefore, the Build Alternative would not have an adverse effect on the historic district and the use from the Build Alternative would result in a <i>de minimis</i> impact.</p> <p><u>Pacific Metals Company and MSF Site 2:</u> The aerial guideway would be within the parking lot of the Pacific Metals Company building and would require partial permanent property acquisition. Permanent incorporation from acquisition and temporary occupancy from guideway construction activities would represent a use. However, the guideway would be at a relatively similar height to the existing utility infrastructure and would not alter the building’s façade or diminish the integrity of the building’s significant design features. The construction activities and alteration of the setting with the new visual element of the aerial structure would not materially impair the building’s integrity and would thus result in no adverse effect. Therefore, the Build Alternative would result in a <i>de minimis</i> impact.</p>	<p>Long-Term and Short-Term/Construction: <i>De Minimus</i> Impact</p>	<p>No avoidance, minimization, or mitigation measures are proposed.</p>	<p>Long-Term and Short-Term/Construction: <i>De Minimus</i> Impact</p>

Topic	Description of Effects	Effects Before Implementation of Measure(s)	Proposed Measure	Effects After Implementation of Measure(s)
Section 4(f) Constructive Use	<p>Construction could produce localized noise and air pollutant emissions or result in temporary lane and/or road closures that could affect any of the Section 4(f) resources. As set forth in NPM TRA-2 and NPM NOI-2, the Build Alternative would adhere to transportation best management practices and noise specifications during construction. Implementation of NMM NOI-1, a Construction Noise Plan and Noise Monitoring Plan, and NMM TRA-2, a Traffic Management Plan, would reduce adverse effects from noise and traffic circulation changes during construction to not adverse.</p> <p>The new open trench along 3rd Street could adversely impact access to Belvedere Park Lake by eliminating vehicle and pedestrian crossings of 3rd Street at La Verne Avenue and left turns at Civic Center Way. U-turns would be allowed at Medick Avenue and Woods Avenue. Vehicles could also access Belvedere Park Lake from the existing entrance on Mednick Avenue. The existing crosswalk at Civic Center Way would remain and a new pedestrian crosswalk east of La Verne Avenue would be constructed to provide access. Therefore, access to the park would be maintained and there would be no constructive use.</p> <p>The underground guideway and Atlantic/Whittier station would be within 80 feet of the Golden Gate Theater. Vibration could adversely affect the historic resource; however, NMM CUL-1 would require protection measures that would reduce the potential for construction vibration to damage the Golden Gate Theater. Thus, there would be no constructive use this Section 4(f) Resource.</p>	<p>Long-Term: Not applicable</p> <p>Short-Term/Construction: Constructive Use</p>	<p>Long-Term: Not applicable</p> <p>Short-Term/Construction: NPM TRA-2 - Construction Best Management Practices for Transportation NPM NOI-2 - Construction Noise and Vibration Control NMM TRA-2 - Traffic Management Plan NMM NOI-1 - Construction Noise Plan and Noise Monitoring Plan NMM CUL-1 - Protection Measures – Differential Settlement/Vibration/Tunnel Boring Machine [TBM] Specifications for CVS Pharmacy [CVS]/Golden Gate Theater</p>	<p>Long-Term and Short-Term/Construction: No Constructive Use</p>

Source: Metro; CDM Smith/AECOM JV 2026.

Note:

¹ A passby refers to the event of a transit vehicle (e.g., train, light rail vehicle, or bus) moving past a specific location.